

15-063-20136-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Gove County. Sec. 34 Twp. 12S Rge. 27W (E) (W)

Location as "NE/CNW&SW&" or footage from lines NW NE NW

Lease Owner Thunderbird Drilling, Inc.

Lease Name Zimmerman "C" Well No. 1

Office Address P. O. Box 18412, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 9-26 19 72

Application for plugging filed 9-26 19 72

Application for plugging approved 9-26 19 72


Plugging commenced 9-26 19 72

Plugging completed 9-26 19 72

Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

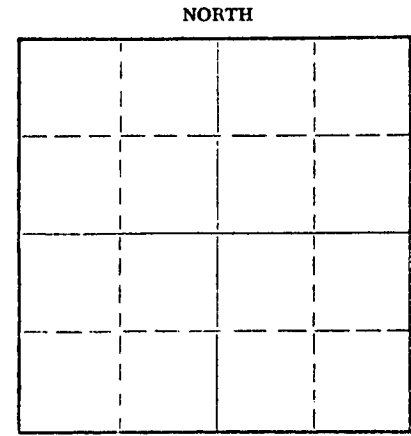

Locate well correctly on above  
Section Flat

Name of Conservation Agent who supervised plugging of this well Bill Nichols

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4550 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	342	-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

50-50 Posmix, 6% Gel  
Mud to 1200', 70 sacks cement  
Mud to 370', 20 sacks cement  
Mud to 40', plug, 1/4 sack hulls, 10 sacks cement

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 2 1972  
CONSERVATION DIVISION  
Wichita, Kansas  
10-02-1972

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor \_\_\_\_\_

Address \_\_\_\_\_

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Don Gardner (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Suite 250, 200 West Douglas, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of September, 19 72

My commission expires December 14, 1973

[Signature]  
Notary Public.

15-063-20136-00-00

DRILLERS LOG

#1 ZIMMERMAN "C"  
NW NE NW Section 34-12S-27W  
Gove County, Kansas

OPERATOR: Thunderbird Drilling, Inc.  
Box 18412  
Wichita, Kansas

CONTRACTOR: Dunne-Gardner Petroleum, Inc.  
Suite 250, 200 West Douglas  
Wichita, Kansas

COMMENCED: September 13, 1972

COMPLETED: September 26, 1972


CASING RECORD: 8-5/8" @ 342' w/250 sx

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	90	Surface clay and sand
90	950	Shale and sand
950	1555	Shale
1555	1790	Shale and shells
1790	1965	Sand
1965	2186	Shale and shells
2186	2225	Anhydrite
2225	2525	Shale
2525	3885	Lime and shale
3885	4447	Lime
4447	4490	Lime and chert
4490	4550	Lime
4550		Rotary total depth

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 2 1972  
CONSERVATION DIVISION  
Wichita, Kansas  
10-02-1972

STATE OF KANSAS )  
                          ) ss  
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log, to the best of my knowledge and belief.

  
Don Gardner

Subscribed and sworn to this 27th day of September, 1972.

My commission expires:  
December 14, 1973

  
Notary Public