

15-063-20045-00-00


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Gove County, Sec. 4 Twp. 12 Rge. (E) 30 (W)

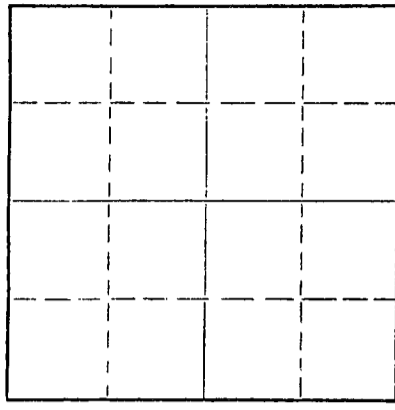

Location as "NE/CNW%SW%" or footage from lines NW-NW  
Lease Owner Barbara Oil Company  
Lease Name Volbracht Well No. 1  
Office Address 509 Union Center Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed February 28 19 70  
Application for plugging filed February 28 19 70  
Application for plugging approved February 28 19 70  
Plugging commenced February 28 19 70  
Plugging completed February 28 19 70  
Reason for abandonment of well or producing formation

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William L. Nichols  
Producing formation Depth to top Bottom Total Depth of Well 4580 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	288	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.  
Mudded up with heavy mud to 1450', Cement (68 sacks) from 1450' to 1225'.  
Mud to 310'. Cement (20 sacks) from 310' to 247'. Mud & hulls to 40'  
Halliburton cement plug then cement (10 sacks) to cellar. Put 2 sacks cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 5 1970  
CONSERVATION DIVISION  
Wichita, Kansas  
03 05 1970

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
R. Douglas Myers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.  
(Signature) R. Douglas Myers  
509 Union Center, Wichita, Kansas 67202 (Address)



SUBSCRIBED AND SWORN to before me this 4th day of March, 19 70

My commission expires August 12, 1971  
Doris Oglesbee Notary Public

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

VOLBRACHT #1  
C NW NW Section 4-12S-30W  
Gove County, Kansas

Commenced: February 19, 1970  
Completed: March 1, 1970

OPERATOR - Barbara Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	90	Surface clay	
90	105	Sand	
105	288	Shale and shells	Ran 8 joints 8-5/8" casing, set @ 286' w/200 sacks cement.
288	1380	Shale and shells	
1380	1452	Sand	
1452	1620	Shale	
1620	1850	Shale and sand	
1850	1883	Anhydrite	
1883	2200	Shale	
2200	2361	Shale and red bed	
2361	2390	Anhydrite	
2390	2840	Shale	
2840	4091	Shale and lime	
4091	4355	Lime	
4355	4421	Lime and chert	
4421	4580	Lime	
4580	TD		Dry and abandoned.

RECEIVED  
STATE CORPORATION COMMISSION  
03-05-1970  
MAR 5 1970  
CONSERVATION DIVISION  
Wichita, Kansas

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW NW Section 4-12S-30W, Gove County, Kansas, to the best of my knowledge and belief.

*E. E. Hall*  
E. E. HALL

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

Before me, the undersigned, a Notary Public within and for said County and State, on this 3 day of March, 1970, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.

*Barbara J. Layton*  
Barbara J. Layton, Notary Public

