
KANSAS

Form CP-3 Rev. 6-4-68

J. Lewis Brock Administrator 500 Insurance Building Wichita, Kansas 67202

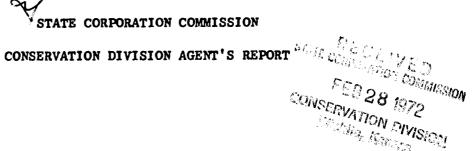

Operator's Full Name Cities Service Oil Company
Complete Address Box 553 Russell, Kansas 67665
Lease Name Colshan "A" Well No. 31
Location NE NW SW Sec. 24 Twp. 11 Rge. (E) (W) 17
County Ellis Total Depth 3623*
Abandoned Oil Well XX Gas Well Input Well SWD Well D & A
Other well as hereafter indicated
Plugging Contractor Knight Casing Pulling
Address Box 405 Chase, Kansas 67524 License No. 436
Operation Completed: Hour 10:15 A Day 24 Month 2 Year 1972
The above well was plugged as follows:
Total Depth 3623° 8 5/8 csg set at 1260° cwc 550 sk.
$5\frac{1}{2}$ csg set at 3622° cw 150 sk cmt.
Set $5\frac{1}{2}$ wood plug at 3200° -poured 10° sd -dumped 5 sk cmt W/dump bailer. (3155-3200)
Cutoff and recovered 2415° of $5\frac{1}{2}$ csg.
Mud to 600; set rock & sand bridge plug (575-600)
Filled 8 5/8 csg with 125 sk Halib. Light cmt. (0-575)

I hereby certify that the above well was plugged as herein stated.

2/28/72 5231-W