

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-109--20,572-00-00

LEASE NAME Richard Mathers

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

WELL NUMBER 1

330 Ft. from ~~S~~ Section Line

1320 Ft. from E Section Line

LEASE OPERATOR Wabash Energy Corporation

SEC. 2 TWP. 12S RGE. 32 (E/W)

ADDRESS P. O. Box 595, Lawrenceville, IL 62439

COUNTY Logan

PHONE#(618) -943-3365 OPERATORS LICENSE NO. 31251

Date Well Completed 10/20/94

Character of Well D&A

Plugging Commenced 10/20/94

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 10/20/94

The plugging proposal was approved on 10-20-94 (date)

by Dave Wann (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? Yes

Producing Formation _____ Depth to Top _____ Bottom T.D. 4840'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
				8-5/8"	257'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet each set.

Mud laden fluid 4840'-2560' 10 sks cement @ 40'

25 sks cement @ 2560' 10 sks in mousehole

100 sks cement @ 1560' 15 sks in rathole

40 sks cement @ 300'

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Emphasis Oil Operations License No. 750

Address P. O. Box 506, Russell, KS 67665-0506

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Wabash Energy Corporation

STATE OF KANSAS COUNTY OF RUSSELL, ss.

Kyle B. Branum


(Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) [Signature]

Kyle B. Branum

(Address) Box 506, Russell, KS 67665-0506

SUBSCRIBED AND SWORN TO before me this 21st day of October, 1994



[Signature]
Glenda R. Tiffin, Notary Public

15-109-20572-00-00

EMPHASIS OIL OPERATIONS
A Division of N-B Company, Inc.
P. O. BOX 506
RUSSELL, KS 67665

DRILLERS LOG

OPERATOR: Wabash Energy Corporation
P. O. Box 595
Lawrenceville, IL 62439

CONTRACTOR: Emphasis Oil Operations
Box 506
Russell, KS 67665

LEASE: Richard Mathers WELL #1

LOCATION: C N/2 N/2 NE
Section 2-12S-32W
Logan County, Kansas

LOGGERS TOTAL DEPTH: 4840'

ROTARY TOTAL DEPTH: 4840'

COMMENCED: 10/13/94

CASING: 8-5/8" @ 257' w/160 sks cement

ELEVATION: 3013' K.B.

COMPLETED: 10/20/94

STATUS: Dry Hole

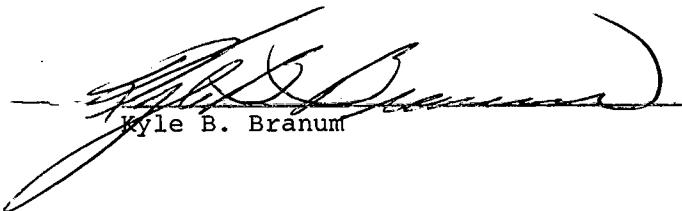
DEPTHS & FORMATIONS

(All measurements from K.B.)

Sand & Shale	260'	Lime	4407'
Shale	2110'	Lime & Shale	4632'
Anhydrite	2556'	Lime	4731'
Shale	2570'	Mississippi	4832'
Shale & Lime	3812'	R.T.D.	4840'
Lime & Shale	4058'		

STATE OF KANSAS)
) ss
COUNTY OF RUSSELL)


Kyle B. Branum, of Emphasis Oil Operations, states that the above and foregoing is a true and correct log of the above captioned well, to the best of his knowledge.


Kyle B. Branum

Subscribed and sworn to before me on October 21, 1994.

My commission expires: February 6, 1996.

GLENDA R. TIFFIN
NOTARY PUBLIC
STATE OF KANSAS
MY APPT. EXPIRES 2-6-96


Glenda R. Tiffin, Notary Public

RECEIVED
STATE CORPORATION COMMISSION
OCT 28 1994
DIVISION
WICHITA KANSAS