

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

15-051-03642-0000

API NUMBER Completed on 10/27/47

LEASE NAME Colahan "A"

WELL NUMBER 27D

SWNW NW
4290 Ft. from S Section Line

4680 Ft. from E Section Line

SEC. 28 TWP. 5 RGE. 20 XCDX(W)

COUNTY Ellis

Date Well Completed 10/27/47

Plugging Commenced 5/13/86

Plugging Completed 5/13/86

TYPE OR PRINT

NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Cities Service Oil and Gas Corporation

ADDRESS 3545 NW 58th Street, Oklahoma City, OK 73112

PHONE#(405) 949-4432 OPERATORS LICENSE NO. 5447

Character of Well input SWD
R7KCC
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? yes

Which KCC/KDHE Joint Office did you notify? District Office #6

Is ACO-1 filed? completed on 10/27/47 if not, is well log attached? yes

Injection
Formation Arbuckle Depth to Top OH 3520 Bottom 3770 T.D. 3770'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
Arbuckle	(injection only)	3520	3770	8-5/8"	1141'	
				5-1/2"	3520'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set. Cut off 8-5/8", welded plate over both strings w/2" collar in 8-5/8" to cmt down 5-1/2" and annulus. Mixed and pumped 225 sx 65/35 poz. + 10% gel, 2% Econolite and 2 sx hulls. P & A completed. State Witness: Mr. Marion Schmidt

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Haliburton License No.

Address Box 428, Hays, Kansas


STATE OF Oklahoma COUNTY OF Oklahoma, ss.

Del G. Oliver, Engineering Manager (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Del G. Oliver

(Address) 3545 NW 58th Street

Oklahoma City, Oklahoma 73112

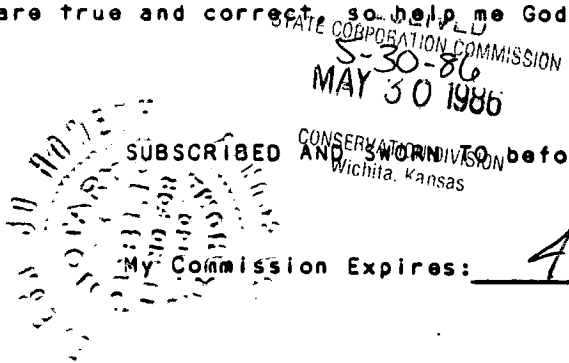

before me this 27 day of May, 1986

Jarosa Jo Stowell Notary Public