

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-181-20560-00-00  
Spot: NESWSENE Sec/Twnshp/Rge: 11-7S-39W  
2127 feet from N Section Line, 832 feet from E Section Line  
Lease Name: YARGER Well #: 1-11  
County: SHERMAN Total Vertical Depth: 5197 feet

\$ 168.90

Operator License No.: 31783  
Op Name: MID-CONTINENT ENERGY OPERATING  
Address: 100 W 5TH ST STE 450  
TULSA, OK 74103

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	340		

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/24/2010 3:00 AM  
Plug Co. License No.: 33575 Plug Co. Name: WW DRILLING, LLC  
Proposal Rcvd. from: DUSTY RHOADES Company: MID-CONTINENT ENERGY OPERATING Phone: (918) 587-6363

Proposed Plugging Method: Ordered 220 sxs 60/40 pozmix - 4% gel with 1/4# flocele per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN Witness Type: NONE  
Date/Time Plugging Completed: 05/24/2010 4:30 AM KCC Agent: DAVID WANN

Actual Plugging Report:

1st. Plug at 3160' w/25 sxs.  
2nd. Plug at 2250' w/100 sxs.  
3rd. Plug at 390' w/40 sxs.  
4th. Plug at 40' w/10 sxs.  
Rathole with 30 sxs.  
Mousehole with 15 sxs.

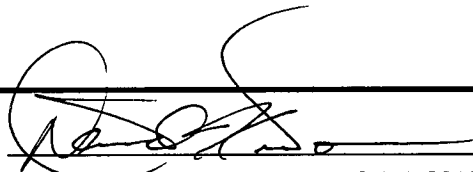
Perfs:

6/02/10  
2010061186

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed  (TECHNICIAN) CM

RECEIVED  
KANSAS CORPORATION COMMISSION

MAY 27 2010

CONSERVATION DIVISION  
WICHITA, KS

MAY 25 2010