

15-109-20082-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Logan County, Sec. 24 Twp. 12S Rge. (E) 34 (W)

Location as "NE/CNWxSWx" or footage from lines C SE NW
Lease Owner Chief Drilling Co., Inc. & Bill J. Porter
Lease Name Nickelson Well No. #1
Office Address 905 Century Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 8/18/77 19
Application for plugging filed 8/18/77 19
Application for plugging approved 8/18/77 19
Plugging commenced 8/18/77 19
Plugging completed 8/18/77 19
Reason for abandonment of well or producing formation

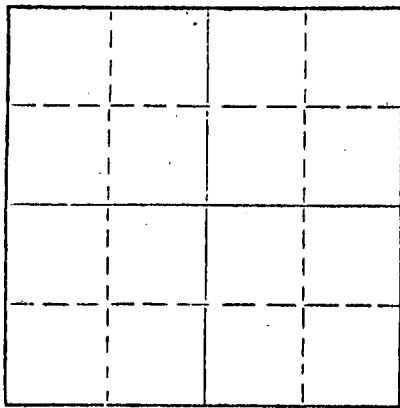

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation Depth to top Bottom Total Depth of Well 4707' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	293'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged through drill pipe @ 1500' w/70 sx. cement
Plugged through drill pipe @ 240' w/20 sx. cement
Plugged through drill pipe @ 40' w/10 sx. cement

RECEIVED
STATE CORPORATION COMMISSION
AUG 23 1977
08-23-1977
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Chief Drilling Co., Inc.
Address 905 Century Plaza, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK ss.
Jim Robinson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Jim Robinson
905 Century Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of August, 19 77

My commission expires
Marilyn Sinard
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979
Marilyn Sinard Notary Public.

WELL LOG

15-109-20082-00-00

CHIEF DRILLING CO., INC. & BILL J. PORTER
905 Century Plaza
Wichita, Kansas 67202

#1 Nickelson
C SE NW Sec. 24-12S-34W
Logan County, Kansas

CONTRACTOR: Chief Drilling Co., Inc.
CASING RECORD: 8 5/8" @ 293' w/180 sx.

COMMENCED: 8/9/77
COMPLETED: 8/18/77

FORMATION	FROM	TO	ELEVATIONS
Surface Mud & Clay	0	295	3159 Gr.
Sand & Shale	295	2275	3161 D.F.
Shale	2275	4278	3164 K.B.
Shale & Lime	4278	4360	
Lime	4360	4707	
Total Depth	4707		

FORMATION TOPS	
Anhydrite	2632 + 532
Base Anhydrite	2656 + 508
Heebner	4043 - 879
Toronto	4066 - 902
Lansing	4084 - 920
BKC	4384 - 1220
Ft. Scott	4580 - 1416
Cher. Shale	4610 - 1446
RTD	4707 - 1543

RECEIVED
STATE CORPORATION COMMISSION
AUG 23 1977
08-23-1977
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK) ss:

I hereby certify that the above is a true and correct copy of the Driller's Log of the well drilled in the C SE NW Sec. 24-12S-34W,
Logan County, Kansas, to the best of my knowledge and belief.

CHIEF DRILLING CO., INC.

Jim Robinson
Jim Robinson, Vice-President

Subscribed and sworn to before me this 22nd day of August, 1977.

MARILYN SINARD
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY COMM. EXP. APR. 30, 1979

Marilyn Sinard
Marilyn Sinard Notary Public