
TO: STATE CORPORATION COMMISSION CONSERVATION DIVISION - PLUGGING 130 SOUTH MARKET, SUITE 2078 WICHITA, KANSAS 67202	990 feet from S Section Line, Lease Name: MORRISON	0-01 wnshp/Rge: 31-6S-25W 330 feet from E Section Line Well #: 1 Total Vertical Depth: 3915 feet
Operator License No.: <u>5474</u> Op Name: <u>NORTHERN LIGHTS OIL COMPANY, LL</u> Address: <u>PO BOX 164</u> ANDOVER, KS 67002	String Size Depth (ft) Pulled (f SURF 8.625 307 0 DVT 2190 PROD 5.5 3902 0	100/300 SX
- ·	QUALITY PLUS OILFIELD SERVICE Company: X-HAND ENGINEERING, # hulls.	
Plugging Proposal Received By: CASE MORRIS Date/Time Plugging Completed: 06/03/2010 2:00 PM Actual Plugging Report: Hooked to 8 5/8" x 5 1/2" annulus - pumped 100 sxs 60/4 backside on vacuum. Hooked to 5 1/2" casing - pumped 400 sxs 60/40 pozmix Ran out of cement - well was beginning to get pressure. Waited three hours. Pumped 20 sxs 60/40 pozmix - 4% gel down 5 1/2" casin Hooked back to 8 5/8" x 5 1/2" annulus - pumped 130 sx with 200# hulls. S.I.P. 100#.	- 4% gel with 350# hulls. ag. S.I.P. 500#.	
Remarks: ALLIED CEMENTING COMPANY-TICE	KET 341611.	RECEIVED KANSAS CORPORATION COMMISSION JUN 0 9 2010 CONSERVATION DIVISION WICHITA, KS
Plugged through: <u>CSG</u> District: <u>04</u> Sig	ned Pat Bedore	inician) CM

Form CP-2/3

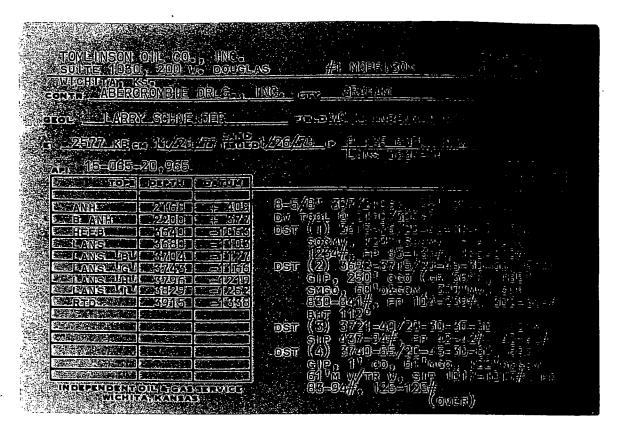

TOMERNSON OR CO., ANC. #1 MORRISON ESESE

DST (\$) 3785-2308/20-45-30-50, 60%-0365M, 760% 66600, 508

(\$089-1069#, \$P 1004-302#, \$08652#

DST (\$) 3817-35/20-45-30-60, 675/48% 76700, 3005% 66 168

378), \$P 1224-1224/6 FP 312-716#, \$000-1698/4, \$000-1698

DST (\$) 3850-38/20-495-30-50, \$W, \$000-1698/4, \$000

÷ť.