


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Russell County, Sec. 30 Twp. 11 Rge. 12 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
NE NE NE
Lease Owner Shields Oil Producers, Inc.
Lease Name Johnson Well No. 1
Office Address Shields Bldg., Russell, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry hole
Date Well completed 7-221983
Application for plugging filed 7-221983
Application for plugging approved 7-221983
Plugging commenced 7-221983
Plugging completed 7-221983
Reason for abandonment of well or producing formation _____
Dry hole
If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes
Name of Conservation Agent who supervised plugging of this well Gilbert Scheck
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,550'
Show depth and thickness of all water, oil and gas formations.

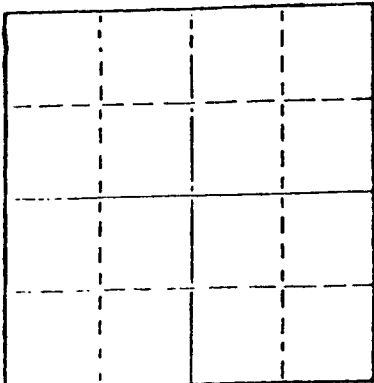

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	474'	Cmtd. w/250 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- Fill hole w/heavy mud
- Push bridge plug to 775'; spotted 30 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 480'; spotted 40 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 330'; spotted 30 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe
- Push bridge plug to 40' w/ $\frac{1}{2}$ sax hulls on plug
- Dump 10 sax cement on plug to cellar
- Dump 10 sax cement in rat hole
- Dump 10 sax cement in mouse hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.


STATE OF KANSAS COUNTY OF RUSSELL, ss.
Jack P. Beeman (employee of owner) or ~~owner~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack P. Beeman
Shields Bldg., Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of August, 1983

Luth Phillips
Notary Public.

My commission expires



RECEIVED
STATE CORPORATION COMMISSION
AUG 03 1983
CONSERVATION DIVISION
Wichita, Kansas