


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Russell County, Sec. 33 Twp. 11 Rge. 13 E/W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines  
NW NE NE

Lease Owner F & M Oil Co., Inc.  
Lease Name Gillett Well No. 1  
Office Address 505 Union Center, Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

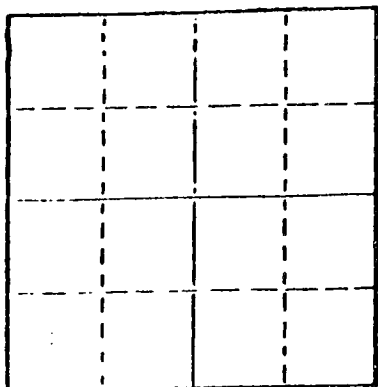

Locate well correctly on above  
Section Plot

Date Well completed Sept. 14, 1976  
Application for plugging filed Sept. 14 1976  
Application for plugging approved Sept. 14 1976  
Plugging commenced Sept. 14 1976  
Plugging completed Sept. 14 1976

Reason for abandonment of well or producing formation  
Dry Hole

If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3310'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom plug @ 500' w/40 sacks cement thru drill pipe.  
Middle plug @ 260' w/20 sacks cement thru drill pipe.  
Top plug @ 40' w/10 sacks cement  $\frac{1}{2}$  sack hulls plug  
2 sacks cement in rat hole.  
Common cement, 8% Gel.

9-17-76

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.  
Larry Curtis (employee of owner) or (owner)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

Larry Curtis  
Box 823, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of September, 1976

My commission expires April 11, 1978

Barclay M. Hague  
Notary Public.



DRILLERS' WELL LOG

15-167-20947-0000

DATE COMMENCED: September 7, 1976  
DATE COMPLETED: September 14, 1976

F & M Oil Co., Inc.  
GILLETT # 1  
NW NE NE  
Sec 33-T11-R13W  
Russell County, Kansas

ELEVATION: 1793 K.B.

0 - 262' Post Rock, Clay, Streaks Sand  
262 - 655' Red Bed, Shale  
655 - 836' Shale  
836 - 873' Anhydrite  
873 - 1320' Shale  
1320 - 2981' Shale and Lime  
2981 - 2984' Shale  
2984 - 3001' Lime and Shale  
3001 - 3013' Lime  
3013 - 3037' Shale  
3037 - 3310' Lime  
3310' RTD

FORMATION TOPS

Anhydrite 836  
Heebner 2981  
Toronto 3001  
Douglas 3013  
Lansing 3037  
RTD 3310

SURFACE PIPE:

Set used 8 5/8", 23# pipe @ 262'  
w/170 sacks Common, 2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS }  
COUNTY OF BARTON } ss.

Larry Curtis, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Larry Curtis

Subscribed and sworn to before me this 16th day of September, 1976.

Dorothy M. Hague  
Notary Public

My Commission Expires: April 11, 1978



RECEIVED  
STATE CORPORATION COMMISSION  
SEP 17 1976

CONSERVATION DIVISION  
Wichita, Kansas