


15-167-19352-0009

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

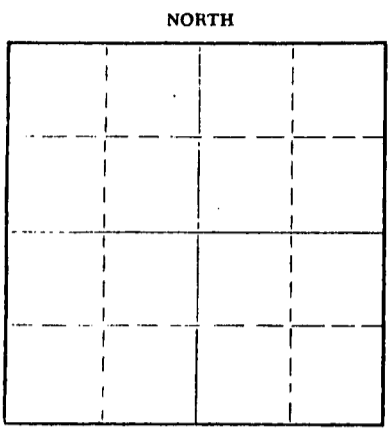

Locate well correctly on above
Section Plat

Russell County, Sec. 33 Twp. 11 Rge. 13 (E) W (W)
Location as "NE/CNW&SW" or footage from lines SW SE NE/4
Lease Owner M.J. Bove
Lease Name Gillette Well No. 2
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil SWD Aug 67
Date well completed 9-23 1963
Application for plugging filed 7-12- 1967
Application for plugging approved 7-17 1967
Plugging commenced July 22 1967
Plugging completed July 31 1967
Reason for abandonment of well or producing formation Uneconomical

If a producing well is abandoned, date of last production Oct. 30 1966
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Truan & Liker
Producing formation L-KC Depth to top 3044 Bottom 3095 Total Depth of Well 3800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
L-KC	O & W	3044	3095	8 5/8	152	None
				5 1/2	3800	2642

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3800 feet to surface feet for each plug set.

Sanded up to 2900' dump 5 sacks of cement on bottom. Pulled pipe pump 15 sacks of mud & 100 sacks of cement in hole with pump truck.
Well completed.

8-24-67 RECEIVED
AUG 24 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes & Son
Address Russell, Kansas

STATE OF Kansas COUNTY OF Russell, ss.

E. T. Drube Operator (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *E. T. Drube*
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of August, 1967

My commission expires January 5, 1969
Ruth E. Miller Notary Public.

15-167-19352-0000

WELL LOG

OPERATOR: Waldo Valley Oil Co., Inc, CONTRACTOR: Terrel Drilling and Producing, Russell, Kansas

LEASE: Amherst #2 COMMENCED: September 16, 1963

LOCATION: SW SE NE Sec. 33-11S-13W Russell County, Kansas COMPLETED: September 27, 1963

DEPTHS & FORMATIONS

Clay & Shale	155 Lime & Shale	2625
Shale	510 Lime	2890
Shale & Red Bed	851 Shale & Lime	3590
Anhydrite	886 Lime & Chert	3620
Shale	1329 Shale & Lime	3780
Shale & Shells	1480 Lime (R.T.D.)	3800

STATE OF KANSAS)
COUNTY OF RUSSELL) ss

I certify that the above is true and correct, to the best of my knowledge.

(Signed)
Joe K. Branum-Terrel Drilling

Subscribed and sworn to before me, a Notary Public, on this 27th day of September, 1963.

(Notary Public)
Notary Public Russell County

My commission expires December 12, 1963.

RECEIVED
STATE CORPORATION COMMISSION
JUL 17 1967
CONSERVATION DIVISION
Wichita, Kansas