


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH



Locate well correctly on above
Section Plat

Saline County. Sec. 33 Twp. 13 Rge. (E) 1 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. NE SE NE
Lease Owner. Barbara Oil Company
Lease Name. Cusick Well No. 1
Office Address. 33 South Clark Street, Chicago 3, Illinois
Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole
Date well completed. June 27, 1944
Application for plugging filed. June 27, 1944
Application for plugging approved. June 27, 1944
Plugging commenced. June 27, 1944
Plugging completed. July 6, 1944
Reason for abandonment of well or producing formation. dry hole

If a producing well is abandoned, date of last production. ---- 19. ----
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. Durkee
Producing formation. ---- Depth to top. ---- Bottom. ---- Total Depth of Well. 3400 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface				8-1/4	210	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from ---- feet to ---- feet for each plug set.

Circulated mud by use of Halliburton pumps for two hours.
Halliburton pumped in 100 sacks of cement, leaving 10 feet
at the top of the ground filled with water. A week later,
after the cement had set, the 10 feet of water was bailed
out and 2 sacks of cement used to cap the hole at the top
of the ground.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Beardmore Drilling Company
Address. 606 Petroleum Building, Wichita 2, Kansas.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Heber Beardmore (employee of owner) ~~operator~~ of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) *Heber Beardmore*
606 Petroleum Building, Wichita 2, Kansas.

SUBSCRIBED AND SWORN TO before me this 14th day of July, 1944.

Jane E. Macaulay
Notary Public.

My commission expires December 22, 1947.



07-15-1944

15-169-00146-00-00

CUSICK NO. 1

NE SE NE Sec. 33-13S-1W,
Saline County, Kansas.

Drilled for: Barbara Oil Company
Drilled by: Beardmore Drilling Company

Casing Record:

8 1/4" 210'

Drilling Commenced: June 9, 1944.


Drilling Completed: June 27, 1944.

<u>FORMATION</u>	<u>DEPTH</u>
surface clay	35
sand	80
shale & lime	210
lime	515
shale & lime	810
shale & shells	1105
shale & lime	1510
lime (broken)	1630
shale & lime	2085
lime (broken)	2130
shale & lime	2275
lime (broken)	2320
shale	2455
shale & lime	2515
shale	2540
chat	2565
chat (broken)	2625
chat	2655
chat (broken)	2710
shale	2725
shale & lime	2800
shale & shells	2905
lime	3120
shale	3195
lime	3215
lime & churt	3245
lime	3305
shale & lime	3370
lime	3400 T.D.

STATE OF KANSAS

SS.

COUNTY OF SEDGWICK

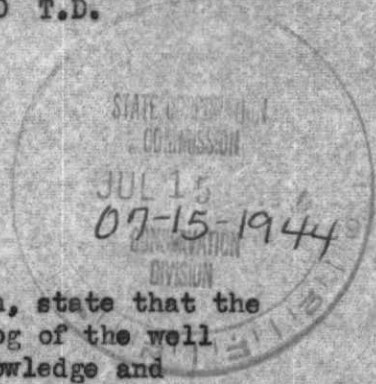

I, the undersigned, being duly sworn on oath, state that the above and within statement is a true and correct record and log of the well drilled on the location above described, to the best of my knowledge and belief.

John Beardmore

Subscribed and sworn to before me this 11th day of July, 1944.

Jane E. Macaulley
Notary Public

My Commission Expires:
December 22, 1947.

PLUGGING
FILE NO. 33 13-1W
BOOK PAGE 123 LINE 14