


15-167-03867-0000

DISTRICT CONSERVATION AGENT'S REPORT

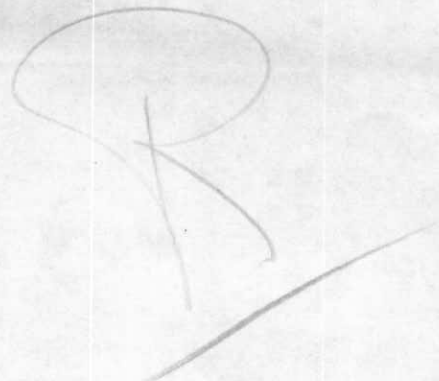

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NE NE NW

SEC. 16 TWP. 11 RGE. 15

Dry Hole x Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 3-B Lease Hines

Operator Sohio Oil Co Address Russell, Kans

Field Fairport County Russell

Total Depth 3432 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 1030' circulated with cement - 5 1/2" at 3408', 125 sax behind.
chat to 3230', and 5 sax cement run with bailer - pulled 2300' 5 1/2" -
mudded hole to 200', wood plug and 15 sax cement - Heavy mud to 35',
wood plug, rock bridge and 10 sax cement to bottom cellar.

RECEIVED

Conservation Div.

DEC 16 1949

STATE CORPORATION

District Conservation Agent

Date 12-15-49

PLUGGING
FILE SEC 16 T 11 R SW
BOOK PAGE 98 LINE 31

RECEIVED
DEC 21 1949
STATE CORPORATION
COMMISSION
KANSAS