

15-167-00370-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Russell County, Sec. 16 Twp. 11 Rge. 15 (E)W (W)

Location as "NE/CNW/SW" or footage from lines SW/4 NW/4 NE/4

Lease Owner Stearns Petroleum Co

Lease Name Stearns Petroleum Co-Howe Well No. 2.

Office Address Russell, Kansas.

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 4-25-54 19

Application for plugging filed 5-26-54 19

Application for plugging approved 5-27-54 19


Plugging commenced June 14, 19 54

Plugging completed June 22 19 54

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes.

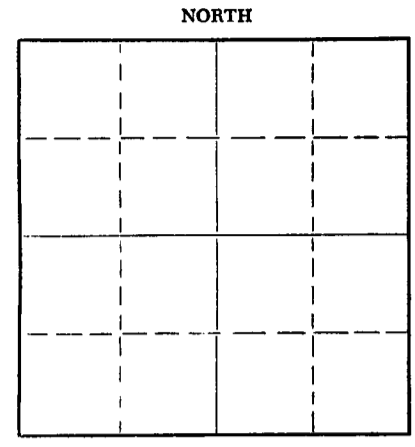

Name of Conservation Agent who supervised plugging of this well Red Horner
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3446 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3446 feet to surface feet for each plug set.

Fixx Hole had filled with mud from 3446 to 3411; five sacks of cement dumped with dumped bailer in hole to form cement plug between 3411 and 3374; Hole filled with mud from 3374 to 250 ft; fifteen foot rock bridge installed between 250 ft, and 235 ft; fifteen sacks of cement poured in hole and hole mudded to 35 ft; five foot rock bridge installed and hole capped with ten sacks of cement.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes and Sons Pipe Pulling Co
Address Russell, Kansas.

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
D. G. COMSTOCK (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D. G. Comstock
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 19 54

My commission expires April 5, 1958
Betty Lou Miller Notary Public.

PLUGGING
FILE SEC 16-11-R-15W
BOOK PAGE 36 LINE 43

7-1-54

HOWE #2 WELL

Stearns Petroleum, Inc.
 Contractor: Stearns Petroleum, Inc.
 Commenced: April 11, 1949
 Completed: April 25, 1949

LOCATION: SW NW NE
 Section 16-11S-15W
 Russell County, Kansas

Totco

Casing Record:

8 5/8" casing - 250' cemented with 100 sks.
 5 1/2" casing - 3396' cemented with 60 sks.

0°	740'
30 min.	1175'
40 min.	1575'
40 min.	2100'
1°	2575'
1°	3153'

Elevation: 1941' D. F.

-WELL LOG-

Surface	0	8
Shale	8	160
Sand and Shale	160	250
Shale	250	300
Sand and Shale	300	495
Red Rock	495	930
Shale	930	1029
Anhydrite Lime	1029	1065
Shale	1065	1120
Shale and Shells	1120	1410
Salt	1410	1570
Lime and Shale	1570	2865
Lime	2865	2927
Lime and Shale	2927	3066
Lime Kansas City	3066	3387
Conglomerate	3387	3393
Lime Arbuckle	3393	3401
		3401 Total Depth

STATE OF KANSAS)
) SS:
 COUNTY OF RUSSELL)

I hereby certify that the above information is true and correct to the best of my knowledge.

SUBSCRIBED AND SWORN to before me this _____ day of _____, 1949.

Notary Public

My Commission Expires:

August 17, 1950

PLUGGING
 FILE SEC. 16 T. 11 R. 15W
 BOOK PAGE 36 LINE 43

RECEIVED
 STATE CORPORATION COMMISSION
 MARCH 7 1951
 CONSERVATION DIVISION
 Wichita, Kansas