

15-167-06159-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Russell County. Sec. 20 Twp. 11 Rge. 15 (E) West (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE SE SW

Lease Owner. Herman Geo. Kaiser, Oil Producer

Lease Name. K o r t a n Well No. 2

Office Address. 909 Palace Building, Tulsa, Oklahoma

Character of Well (completed as Oil, Gas, or Dry Hole). Oil

Date well completed. September 7, 1951

Application for plugging filed. October 14, 1955

Application for plugging approved. October 17, 1955 1955

Plugging commenced. November 5, 1955


Plugging completed. November 9, 1955 1955

Reason for abandonment of well or producing formation. Commercially un-

productive

If a producing well is abandoned, date of last production. November 1, 1955

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

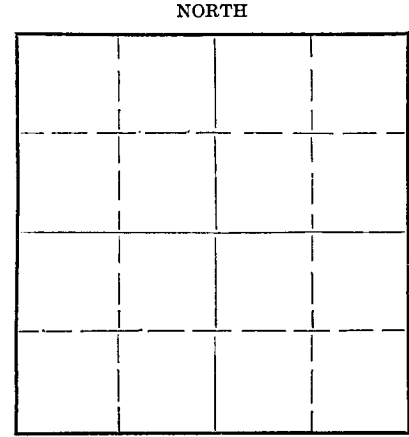

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. Milton Galyardt, Box 145, Russell, Kansas

Producing formation. Arbuckle Depth to top. 3360 Bottom. Total Depth of Well. 3360 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				5-1/2"	3361'	2264.30 ft.
				8-5/8"	133'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Plugged back with sand to 3240. Dumped 5 sx cement.
Pulled 5-1/2".
Plugged surface with pump truck (Sun Cementing Co.)
Mixed and pumped in 20 sx Gel Mud. Put in plug.
Mixed and pumped in 100 sx cement. Shut in with 200# psi.

11-23-55

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Herman Geo. Kaiser, Oil Producer
Address. 909 Palace Building, Tulsa, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.


Walter Kaiser (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) Walter Kaiser
909 Palace Building, Tulsa, Oklahoma
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of November, 1955

Karol O. Stuter
Notary Public.

My commission expires.....



WELL LOG

15-167-06159-000

J. D. Ferrell Drilling Co., Inc.
Kertan #2

NE SE SW
Sec. 20-11S-15W
Russell County, Kansas

Total Depth: 3361'
Comm: 7-22-51 Comp: 8-7-51
Contractor: J. D. Ferrell Drilling Co., Inc.
Rotary: C-356
61'

Elevation: 1820' D.F.

Casing Records: 150' - 8 5/8" surface casing cemented with 100 sacks cement.
3360' - 5 1/2" casing cemented with 150 sacks cement.

Figures Indicate Bottoms of Formations:

Cellar	4		
Post Rock and Shale	80		
Shale and Shells	880		
Red Bed and Shale	915		
Anhydrite	960		
Shale and Shells	1125		
Shale	1490		
Shale and Lime	1560		
Lime	1650		
Lime and Shale	1830		
Lime	2225		
Lime and Shale	2685		
Lime	3240		
Lime and Chert	3263		
Lime	3294		
Arbuckle	3361		
		Tops:	
		Anhydrite	915
		Topoka	2043
		Hoehner	2893
		Kansas City	2946
		Conglomerate	3251
		Arbuckle	3259
		Rotary Total Depth	3361

We hereby certify this to be a correct and accurate log of the above described well as shown on the Daily Drilling Reports.

J. D. FERRELL DRILLING CO., INC.

Subscribed and sworn to before me this _____ day of _____, 1951.

Notary Public

My commission expires _____.

RECEIVED
STATE CORPORATION COMMISSION
OCT 15 1955
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 20 T 11 R 15 W
BOOK PAGE 8 LINE 42