

15-167-00463-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Reich Russell County. Sec. 22 Twp. 11S Rge. (E) 15(W)

Location as "NE/CNW/SW" or footage from lines. SW NW NE

Lease Owner Bergman Oil Company

Lease Name Reich Well No. 1

Office Address 425 Union Center Building, Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) oil well

Date well completed May 22, 19 60

Application for plugging filed July 8 19 63

Application for plugging approved July 8 19 63


Plugging commenced July 13, 19 63

Plugging completed July 14 19 63

Reason for abandonment of well or producing formation non-commercial

If a producing well is abandoned, date of last production June 19 63

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

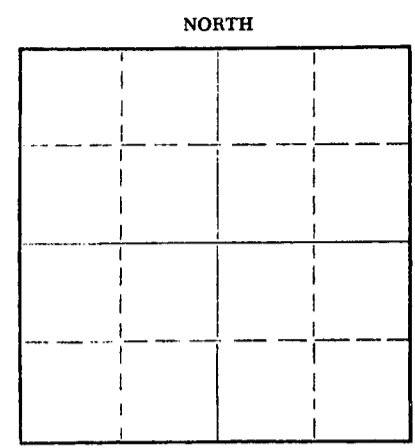

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation Arbuckle Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	228	8-5/8	228	none
			3375	5-1/2	3375	2300

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from top feet to bottom feet for each plug set.

Set bridge at 225, dump 6 sacks cement.
bail surface dry, cement bottom with 19 sacks (total) 25 sacks) mud to 30 foot.
10 sacks on top.

10-4-63

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bergman Oil Company #507
Address 425 Union Center Building, Wichita 2, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
HAROLD BERGMAN, MANAGER (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
425 Union Center Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 3rd day of October, 19 63

My commission expires August 2, 1966

[Signature]
Notary Public.

DRILLER'S LOG

15-167-00463-0000

Reich #1
SW NW NE - 22-11S-15W
Russell County, Kansas

Date Started: May 10, 1960
Date Completed: May 22, 1960
Elevation: 1833 K. B.

0- 500	Surface clay and sand
500- 900	Shale, Red Bed
900- 924	Anhydrite
924-1035	Shale, Shells
1035-1200	Red Bed, Shale
1200-1300	Shale and Shells
1300-1470	Salt Shale and shells
1470-1665	Shale and Shells
1665-1855	Shale and Shells
1855-1970	Lime and Shale
1970-2080	Shale and Lime
2080-2210	Shale and Lime
2210-2340	Lime and Shale
2340-2475	Shale and Lime
2475-2570	Shale and Lime
2570-2690	Shale and Lime
2690-2750	Lime and Shale
2750-2825	Lime and Shale
2825-2900	Lime and Shale
2900-2950	Shale and Lime
2950-2992	Shale and Lime
2992-3020	Lime
3020-3035	Lime
3035-3085	Lime and Shale
3085-3120	Lime
3120-3175	Lime
3175-3230	Lime and Shale
3230-3280	Lime and Shale
3280-3314	Shale and Lime
3314-3350	Shale and Lime
3350-3375	Lime and Shale
3376	T.D.

AFFIDAVIT

STATE OF KANSAS)
COUNTY OF SEDGWICK:) SS:

I do swear that the statements and matter herein contained are true to the best of my knowledge.

BERGMAN DRILLING, INC.

Harold Bergman
Harold Bergman

Subscribed and sworn to before me this 25th day of May, 1960.

My Commission Expires:
August 2, 1962

Norma J. Johnson
Norma J. Johnson, Notary Public

