

15-167-05345-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Russell County, Sec. 29 Twp. 11 Rge. 15 (E) W (W)
Location as "NE/CNW/SWK" or footage from lines SW SW SE
Lease Owner Bennett-Liggett Oil Co.
Lease Name Abbott Well No. 3
Office Address 1212 Union National Bldg. Wichita, Kans.
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed _____ 19____
Application for plugging filed 5/16 19 73
Application for plugging approved _____ 19____
Plugging commenced 5/21 19 73
Plugging completed 5/23 19 73
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

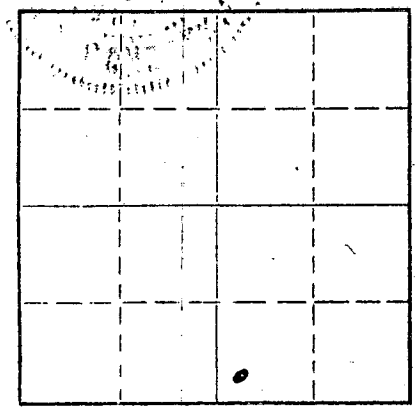

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3310 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	906'	0
				5 1/2"	3309'	1800'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Plug at 350'. Rock from 350' to 340'. Run 5 yards of ready mix cement from 340' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUN 5 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn's Pipe Pulling Co.
Address Box 156 Ellinwood, Kansas 67526

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
H.C. BENNETT (employee of owner) or (owner or operator) of the above-described well being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H.C. Bennett

(Address) _____



Subscribed and sworn to before me this 4th day of JUNE, 1973

William D. Scheverman
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas

15-067-05345.000


COPY

Company: BENNETT & LIGGETT
Farm: Abbott No. 3

SEC. 29 T. 11 R. 15W
SW SW SE

Total Depth, 3310'
Comm. 4-26-54 Comp. 5-9-54
Shot or Trated.
Contractor, Stearns Petroleum, Inc.
Issued, 8-21-54

County Russell
KANSAS



CASING:

8 5/8" 906.30' cem w/450 sx
5 1/2" 3309' cem w/200 sx

Elevation, 1832' DE

Production, Pmp. 8 BO & 10 Wtr.

Figures indicate Bottom of Formations.

surface clay and rock	70
shale	300
sand and shale	485
sand	575
red bed and shale	850
red bed	892
anhydrite	928
red rock and shale	1275
salt and shale	1475
shale and shells	1550
lime and shale	2894
shale and lime	2914
lime and shale	2944
lime and shale	3073
lime	3135
lime and shale	3214
lime	3277
lime and shale	3310
Total Depth	

Tops:

Heebner	2894
Dodge	2914
Lansing-Kansas City	2944

RECEIVED
STATE CORPORATION COMMISSION
MAY 18 1973
CONSERVATION DIVISION
Wichita, Kansas