

15-167-30049-00-00


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Russell County. Sec. 25 Twp. 13 Rge. 12 (E) (W)X

Location as "NE/CNW/SW" or footage from lines NW SW SW
Lease Owner Rosencrantz-Bemis Enterprises, Inc.
Lease Name Bohnen Well No. 1
Office Address P. O. Box 713-Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-10-65 19
Application for plugging filed 6-10-65 19
Application for plugging approved 6-10-65 19
Plugging commenced 6-10-65 19
Plugging completed 6-10-65 19
Reason for abandonment of well or producing formation Dry Hole

NORTH

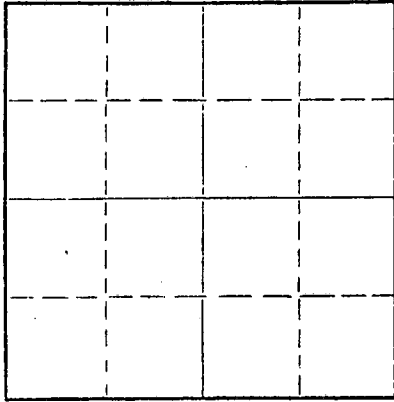

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3399 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Casing	0'	323'	8 5/8"	323'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled Hole with heavy mud from 3399' to 300', plugged hole with 1/2 sacks hulls, 20 sacks cement thru drill pipe, filled hole with mud to 35' plugged with 1/4 sacks of hulls 10 sacks cement to cellar.

RECEIVED
STATE CORPORATION COMMISSION

JUL 27 1965
07-27-1965
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rosencrantz-Bemis Drilling Co.
Address P. O. Box 713-Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss. _____

_____ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) O. E. Rosencrantz
Box 713-Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of July, 1965



My commission expires January 2, 1966

Notary Public.

15-167-30049-00-00

WELL LOG

ROSENCRANTZ-BEMIS ENTERPRISES, INC.-OPERATOR

ROSENCRANTZ-BEMIS DRILLING CO.-CONTRACTOR

BOHNEN #1
NW SW SW Sec 25-13-12W
Russell County, Kansas

TD: 3399'

Commenced: 5-25-65
Completed: 6-10-65

Casing:
8 5/8" Set @ 323'

Cemented:
with 125 sacks

FORMATIONS:

DEPTH:

Top Soil	10'
Shale and Post Rock	110'
Shale	195'
Sand	320'
Shale	490'
Sand	620'
Shale	732'
Anhydrite	763'
Shale and Shells	1190'
Salt	1365'
Shale and Lime	2705'
Lime	2858'
Lime and Shale	2950'
Lime	3225'
Lime and Chert	3333'
Lime	3399'

RECEIVED
STATE CORPORATION COMMISSION
JUL 27 1965
07-27-1965
CONSERVATION DIVISION
Wichita, Kansas