

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION

Form CP-1  
March 2009

This Form must be Typed  
Form must be Signed  
All blanks must be Filled

WELL PLUGGING APPLICATION

Please TYPE Form and File ONE Copy

OPERATOR: License #: 6568  
Name: Kaiser-Francis Oil Company  
Address 1: P. O. Box 21468  
Address 2: \_\_\_\_\_  
City: Tulsa State: OK Zip: 74121 + 1468  
Contact Person: Charlotte Van Valkenburg  
Phone: (918) 491-4314

API No. 15 - 175-20168-8000  
If pre 1967, supply original completion date: \_\_\_\_\_  
Spot Description: \_\_\_\_\_  
C SE NW Sec. 7 Twp. 33 S. R. 31  East  West  
1980 Feet from  North /  South Line of Section  
1980 Feet from  East /  West Line of Section  
Footages Calculated from Nearest Outside Section Corner:  
 NE  NW  SE  SW  
County: Seward  
Lease Name: Graber Well #: 1

Check One:  Oil Well  Gas Well  OG  D&A  Cathodic  Water Supply Well  Other: \_\_\_\_\_  
 SWD Permit #: \_\_\_\_\_  ENHR Permit #: \_\_\_\_\_  Gas Storage Permit #: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks  
Surface Casing Size: 8 5/8 Set at: 1567 Cemented with: 700 Sacks  
Production Casing Size: 5 1/2 Set at: 5973 Cemented with: 150 Sacks

List (ALL) Perforations and Bridge Plug Sets: 4406-4414, 5624-5628, 5952-5956

Elevation: 2776 ( G.L. /  K.B.) T.D.: 5973 PBDT: 5973 Anhydrite Depth: 2110 - 2550  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Junk in Hole  Casing Leak at: \_\_\_\_\_  
(Interval)

Proposed Method of Plugging (attach a separate page if additional space is needed):

Set CIBP @ 4300' & dump 2 sxs cmt on top. Cut & pull 5 1/2" csg @ 1500'. Spot 50 sx cmt plug @ 1500'. Spot 50 sx cmt plug @ 630'. Cmt from 40' to surface.

Is Well Log attached to this application?  Yes  No Is ACO-1 filed?  Yes  No

If ACO-1 not filed, explain why:

RECEIVED

JUN 25 2010

KCC WICHITA

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission

Company Representative authorized to supervise plugging operations: Carrol Fulton

Address: P. O. Box 746 City: Perryton State: TX Zip: 79070 + \_\_\_\_\_

Phone: (806) 435-6670

Plugging Contractor License #: 6568 Name: Kaiser-Francis Oil Company

Address 1: P. O. Box 21468 Address 2: \_\_\_\_\_

City: Tulsa, State: OK Zip: 74121 + 1468

Phone: (806) 435-6670

Proposed Date of Plugging (if known): Upon approval

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent

Date: 6/24/10 Authorized Operator / Agent: \_\_\_\_\_


*Charlotte Van Valkenburg*  
(Signature)  
Charlotte Van Valkenburg

Mall to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

*KW*

**KFOC - Graber #1**  
**SE NW Sec 7-33S-31W**  
**Seward County, KS.**

Updated by M. Carr 7/1/09  
WI : 52.5%  
NRI: 42.81%

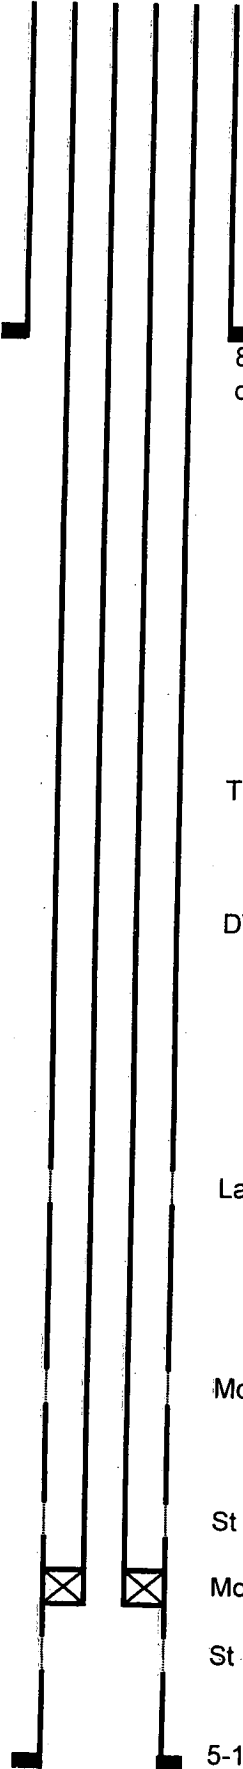

8-5/8" 23# @ 1567'  
cmt w/ 700 sx

TOC 2nd stg @ 2990'

DV tool??

Lansing 4406-14'

Morrow 5624-28'

St Louis 5900-04' (questionable perfs)

Mod R pkr @ 5923'

St Louis 5952-56'

5-1/2" 14# @ 5973'

RECEIVED  
JUN 25 2010  
KCC WICHITA



CORPORATION COMMISSION

Mark Parkinson, Governor Thomas E. Wright, Chairman, Joseph F. Harkins, Commissioner, Ward Loyd, Commissioner

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

KAISER-FRANCIS OIL COMPANY  
PO BOX 21468  
TULSA, OK 74121-1468

June 25, 2010

Re: GRABER #1  
API 15-175-20168-00-00  
7-33S-31W, 1980 FNL 1980 FWL  
SEWARD COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division has received your plugging proposal, form CP-1, for the above well and has reviewed the proposal for completeness. The central office will now forward your CP-1 to the district office listed below for review of the proposed plugging method. **Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113(b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit in accordance with K.A.R. 82-3-600.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well. This notice in no way constitutes authorization to plug the above well by persons not having legal rights of ownership or interest in the well.

**This notice is void after December 22, 2010. The CP-1 filing does not bring the above well into compliance with K.A.R. 82-3-111 with regard to the Commission's temporary abandonment requirements.**

Sincerely

Steve Bond  
Production Department Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888