

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-22254-00-00
Spot: S2SWNENE Sec/Twnshp/Rge: 28-29S-15W
1060 feet from N Section Line, 990 feet from E Section Line
Lease Name: HIRT TRUST Well #: 1-28
County: PRATT Total Vertical Depth: 4880 feet

Operator License No.: 31980
Op Name: LOTUS OPERATING COMPANY, L.L.C.
Address: 100 S MAIN STE 420
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	410		WITH 670 SX CMT
PROD	4.5	4525	3327	WITH 165 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 06/02/2010 8:00 AM
Plug Co. License No.: 33939 Plug Co. Name: BLACKGOLD OILFIELD SERVICE LLC
Proposal Rcvd. from: ROBIN BROWN Company: LOTUS OPERATING Phone: (620) 546-4801

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: NONE
Date/Time Plugging Completed: 06/02/2010 9:30 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

CIBP @ 4056' WITH 2 SX CMT. 1ST PLUG AT 998' WITH 15 SX GEL & 50 SX CMT.
2ND PLUG AT 307' WITH 75 SX CMT. 3RD PLUG AT 60' WITH 30 SX CMT.

Perfs:

Top	Bot	Thru	Comments
4350	4356		LANSING
4106	4115		LANSING

INVOICED
DATE 6/22/10
INV. NO. 2010061272

RECEIVED
KANSAS CORPORATION COMMISSION

JUN 21 2010

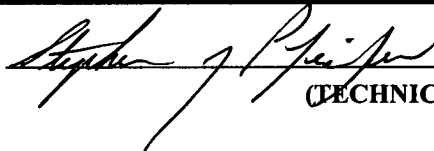
CONSERVATION DIVISION
WICHITA, KS

Remarks: USED 60/40 POZMIX 4% GEL BY ALLIED.

Plugged through: TBG

District: 01

Signed


(TECHNICIAN)

RECEIVED

JUN 14 2010

KCC DODGE CITY