

15-167-19211-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Russell County. Sec. 32 Twp. 11 Rge. (E) 15 (W)

Location as "NE/CNW/SW" or footage from lines E 1/2 SW 1/2

Lease Owner Aylward Drilling Company

Lease Name Booth Shallow S.W.D. Well No. None

Office Address 909 First National Bank Building, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) S.W.D. well

Date well completed _____ 19____

Application for plugging filed November 14, 1968

Application for plugging approved November 15, 1968


Plugging commenced November 16, 1968

Plugging completed November 16, 1968

Reason for abandonment of well or producing formation not used

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

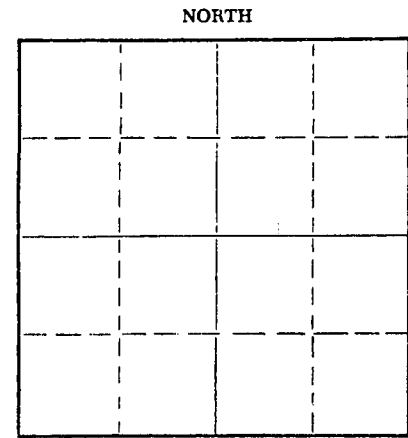

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 787' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7" O.D.	452'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

This is a shallow S.W.D. well and no pipe was recovered. Allied Cementing Company, Incorporated squeezed well with 15 sacks of mud and 90 sacks of cement. Cemented well from 460' to surface.

RECEIVED
STATE CORPORATION COMMISSION
NOV 19 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

Address _____

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Duane Jessup

(employee of owner) or (owner or operator) of the above-described

well, being first to be sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well filed and that the same are true and correct. So help me God.

(Signature) _____

Duane Jessup
909 First National Bank Building, Wichita, Kansas

(Address)


SUBSCRIBED AND SWORN to before me this 18th day of November, 1968

My commission expires October 22, 1972

Shirley Sheeks

Shirley Sheeks

Notary Public.



S. B. Barnes, Etal
Booth Lease
E 1/2 SW1/4 32-11-15
Russell County, Kansas
Fairport Pool
Disposal Well Log

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0'	417'	Sand & Shale
417'	446'	Dakota Water Sand & Shale
446'	452'	Shale & Red Rock
452'	787'	Red Rock & Sand

Top of Anhydrite 787'

7" OD Casing Run to 452' in a 11" hole and Cemented to Surface with 175 sacks of cement by Halliburton, after 48 hours cement time, hole was then drilled to top of Anhydrite, hole was then throughly washed down and tested and on an imput test by Halliburton, well took two (2) Barrels of water per minute under 150/ maximum test in Cheyenne Formation.

Dakota Sand Formation is cased off. Base of Dakota Formation is 442'