


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 18 Twp. 11 Rge. 16 (E) (W) x
Location as "NE/CNW%SW%" or footage from lines NE NE SW
Lease Owner Okmar Oil Co.
Lease Name Cress Well No. #1
Office Address 820 Union National Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 1-10-64 19
Plugging completed 1-14-64 19
Reason for abandonment of well or producing formation

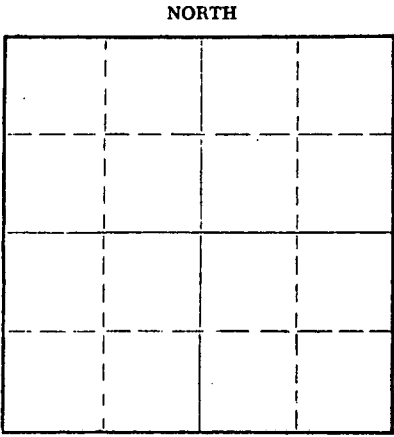

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3352' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded back to 3330', mixed and ran 4 sacks cement thru dump bailer.
Circulated hole with 35 sacks gel and spotted 50 sacks cement at 325'
Mudded hole to 35', set 5' rock bridge, mixed and dumped 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 16 1964

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W.C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 15 day of January, 19 64
My commission expires 24 October 1964
Sidney D. Miller
Notary Public.



15-051-19306-0000

Trans Era Petroleum, Inc.
Cress #1

NE 1/4 SW 10-11-16
Ellis County, Kans.

Total Depth: 3343'
Comm. 3/7/53
Comp. 3/21/53

Casing

8 5/8" Set @ 801'
5 1/2" Set @ 3341 1/2'

Cement

330 sacks Lone Star
100 sacks Lone Star

Formation	Depth
Shale-sand	450
Sand	510
Sand-shale	660
Red bed	970
Red bed-shale	1018
Anhydrite	1045
Shale	1355
Shale-shells	1780
Shale-lime	2376
Shale	2515
Shale-lime	3055
Lime	3265
Lime-chert	3313
Shale-lime	3343'

RECEIVED
STATE CORPORATION COMMISSION
NOV 6 1963
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to the best of my knowledge.

_____ *Carla Belf* _____

Subscribed and sworn to before me this 26th day of March, 1953.

_____ *Margie Cooper* _____
Notary Public

My commission expires 1-30-57.