


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

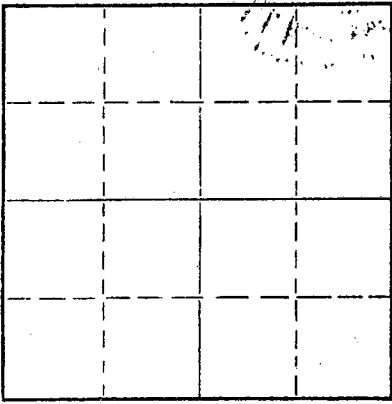

Locate well correctly on above
Section Plat

Ellis County, Sec. 18 Twp. 11 Rge. 16 (E) (W) x

Location as "NE/CNWxSWx" or footage from lines NW NE SW
Lease Owner Okmar Oil Co.
Lease Name Thurston Well No. #2
Office Address 1130 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11-10-69 _____ 19____
Plugging completed 11-11-69 _____ 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3385' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3385'	Plug only
				8 5/8"	1010'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3200'. Mixed and ran 5 sacks cement thru dump bailer.
Mudded hole to 420', set 20' rock bridge. Mixed and ran 12 sacks cement thru dump bailer. Mudded hole to 70', set 10' rock bridge. Mixed and dumped 8 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
NOV 17 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of November, 1969.

My commission expires October 1972
SIDNEY D. MILLER
NOTARY PUBLIC
BARTON COUNTY, KANSAS

Sidney D. Miller
Notary Public.

15-051-22809-0000


WELL LOG BUREAU -- KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company - OLIVER MOORSHEAD
Farm - Thurston No. 2

SEC. 18 T. 11 R. 16W
NW NE SW

Total Depth. 3385
Comm. 12-3-47 X Comp. 3-19-48 X
Shot or Treated.
Contractor.
Issued. 7-21-51

County. Ellis
KANSAS



CASING:
8" 1010'
5" 3385'

Elevation. 1811

Production. Pot. 100 BOPD

Figures Indicate Bottom of Formations.

NO LOG AVAILABLE

RECEIVED
STATE CORPORATION COMMISSION
OCT 6 1960
CONSERVATION DIVISION
Wichita, Kansas