

R

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 131-39

LOCATION 20/2 - NW - NW

SEC. 19 TWP. 11 RGE. 16-W

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 2-S.W.D Lease Slimmer SLIMMER

Operator Cities Service Oil Co Address Box #751 - Great Bend - Kansas

Field \_\_\_\_\_ County Ellis

Total Depth 3765 Feet.


(Describe briefly the manner in which the well was plugged)

Surfacer Pipe 8 3/8 - 1045 ft Circulated with Cement  
5 1/2" casing set at 3470 ft & cemented with 200 sacks cement  
Filled hole back to 3470 ft - Set Plug & 5 sacks cement  
at 3470 ft with Wump's Bailey - Shot off & recovered  
2350 ft of 5 1/2" casing - Filled hole with mud to 1045 ft  
Set Plug & 15 sacks cement - Filled with mud to 200 ft  
Plug & 10 sacks cement - Surfacer Plug 30 ft below the  
Surfacer & 10 sacks of Cement.

Patterson & Son - Pipe Pullers.  
& Pluggers

C. H. Stough  
District Conservation Agent

Date 9-26-47

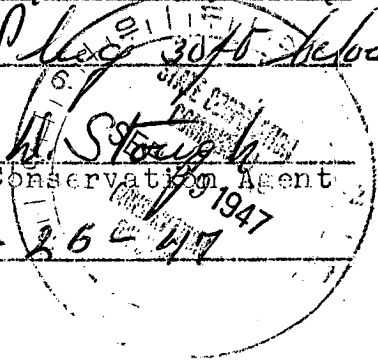

**PLUGGING**  
FILE SEC 19 T 11 R 16W  
BOOK PAGE 131 - LINE 39