

To:
 STATE CORPORATION COMMISSION
 Wichita State Office Bldg. - PLUGGING SECTION
 130 S. Market, Room 2078
 Wichita, Kansas 67202

API NUMBER 15-205- 19831-00-00
 NW NW NE Sec/Twp/Rge Sec 16 T29S R17E
4846 (GPS) feet from south section line
2173 (GPS) feet from east section line

TECHNICIAN'S PLUGGING REPORT

Operator License # 101
 Operator: State Of Kansas Fee Fund
 Name & Stich North Project
 Address _____
 AB oil well XXXXXX Gas Well _____

Lease/Well# Stich North-Wiles gps# MCD 07
 County Wilson
 Well Total Depth 850 (est) feet
 Production Pipe: NA Size Feet NA
 Surface Casing: 10 Size Feet NA
 SWD Well/ Input Well _____ D & A _____

Other well as hereinafter indicated: _____

Plugging Contractor: K-W Oil Well Service, Inc Lic. # 3097

Address: 19450 Ford Road, Chanute, Kansas 66720

Company to plug at: Hour: _____ Day: 19 Month: 6 2009

Plugging proposal received from: Sam Kepley

Company Name: K-W Oil Well Service, Inc Phone: 620-433-7730

Were: Wash well to TD and fill from btm to top with portland cement.

RECEIVED

SEP 08 2009

KCC WICHITA

Plugging Proposal Received by:

Alan M. Dunning

TECHNICIAN

Plugging attended by Agent: All _____ Part _____ None XXXXXX

Operations Completed: Hour: _____ Day: 19 Month: 6 2009

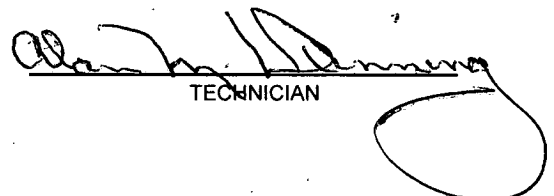
Actual Plugging Report: 4' of 12" surface pipe was set to bring well to surface. 1" pipe was lowered down to 25' where the pipe hit rocks. The drilling rig was moved to location and the well drilled to 500' thru wood and rocks. A 1" cement string was then lowered to 500' and the well pumped full of cement from btm to top thru this cement string. A total of 195 sacks of portland cement were used to plug well. The well was cut off below plow depth and the location restored.

Remarks: Control # 20090028-022

(If additional description is necessary, use BACK of this form.)

I did not observe this plugging.

Signed:


 TECHNICIAN