


15-179-20311-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

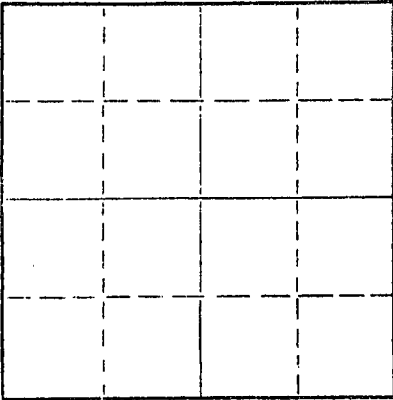

Locate well correctly on above
Section Plat

Sheridan County. Sec. 13 Twp. 10 Rge. 26 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines SW SE NW

Lease Owner Dreiling Oil, Inc.

Lease Name Gano Well No. 'A' #2

Office Address Rt. #2, Victoria, Kansas 67671

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 10-29 19 73 72

Application for plugging filed 2-2 19 73

Application for plugging approved 2-6 19 73

Plugging commenced 2-28 19 73

Plugging completed 2-28 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well W.L. Nichols, Morland, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4110 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Casing				4 1/2"	4110	2525'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged with 5 sacks Hulls, 9 Gel, 110 cu. ft. cement, 17 Gel. Released plug, 30 cu. ft. cement, 4 Gel, 10 cu. ft. cement. Input 500#, Shut in 200#

RECEIVED
STATE CORPORATION COMMISSION
MAR 9 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Russ Casing Pulling, Inc.

Address Box 1082, Great Bend, Kansas 67530


STATE OF KANSAS, COUNTY OF ELLIS, ss.

I, Joe Hess, Sec. Treas. of Drlg. Contrc. (employer of owner or leasee or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____

JOE HESS, Rt. #2, Victoria, Kansas 67671
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of March, 1973



CECILIA BASGALL
Notary Public.

My commission expires September 13, 1976

15-179-20311-00-01

DREILING OIL, INC.

Victoria, Kansas 67671

Dreiling Oil, Inc. WELL LOG
Rt. #2

Company	Victoria, Kansas 67671	Sec. 13	Twp. 10	Rng. 26
Farm	Gano A	No. #2 Wash Down	Location	SW SE NW
Total Depth	4,110'		County	Sheridan
Comm.	10-25-72	Comp. 10-29-72	Elevation:	2591 K. B.
Contractor	Dreiling Oil, Inc. Rt. #2 Victoria, Kansas 67671			2588 D. F. 2586 G. R.

Casing Record	Cement Record	Production:
253' - 8 5/8"	165 sacks cement	
4107' - 4 1/2"	cemented w/10 bbl. Fresh Flush	
	200 Gal. B.J. Mud Sweep	
	50 sks. 50/50 Poz Mix-27 Gal	
	12# Gilsomite per sk. 175 sks. common w/12% Salt	
	Figures Indicate Bottom of Formations	

0'	160'	Top Soil, Sand
160'	165'	Yellow Clay
165'	253'	Blue Shale
253'	400'	Shale
400'	1395'	Shale, Sand
1395'	1810'	Shale
1810'	1990'	Sand
1990'	2050'	Red Bed, Shale
2050'	2221'	Shale
2221'	2259'	Anhydrite
2259'	2615'	Shale, Lime Streaks
2615'	3139'	Shale
3139'	3725'	Shale, Lime
3725'	4080'	Lime
4080'	4110'	Drill New Hole
4110'	T.D.	


RECEIVED
STATE CORPORATION COMMISSION
2-6-1973
FEB 6 1973
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

I, Joe Hess, Secretary Treasurer, of Dreiling Oil, Inc. upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Gano A-#2 Wash Down.

Joe Hess
JOE HESS

and sworn to before me this 2nd day of November, 1972



Cecilia Basgall
CECILIA BASGALL NOTARY PUBLIC

My commission expires: September 13, 1976