

15-097-19003-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Kiowa County, Sec. 10 Twp. 27 Rge. 19 (E) (W)

NORTH



Locate well correctly on above
Section Plat

Location as "NE/CNW&SW¼" or footage from lines NE/NE/NE
Lease Owner Hilton Drilling Company, Inc.
Lease Name Friends University Well No. #1
Office Address 925 Patton Street, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed Yes 19____
Application for plugging approved Yes 19____
Plugging commenced _____ 12-2 1958
Plugging completed _____ 12-8 1958
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. La Camp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4995' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"		
				5 1/2" casing		2,724'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into T.D. 4995'.
Plugging started 12-2-58. Finished 12-8-58.
Plugged off bottom and sanded to 4790'. Dumped 5 sacks cement.
Worked and shot pipe. Shot 5 1/2" casing at 2,724'. Pulled pipe out
of hole and plugged well as follows: Plugged well with mud to 300'.
Set rock bridge and dumped 20 sacks cement. Filled hole with mud.
Set rock bridge and mixed 10 sacks cement for cap on well. Well
completed.

RECEIVED
STATE CORPORATION COMMISSION

DEC 10 1958

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J.O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes
Box 221, Great Bend, Kans. (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of December, 1958

My commission expires November 8, 1960

Betty S. Edman
Notary Public.

PLUGGING
FILE SEC. 10 T. 27 R. 19W
BOOK PAGE 146 LINE 6

DRILLER'S LOG


COMPANY: Hilton Drilling Co., Inc. LOCATION: NE NE NE
 Section 10-27S-19W
 CONTRACTOR: Hilton Drilling Co., Inc. Kiowa County, Kansas
 FARM NAME: Friends University #1 ELEVATION: 2252 K. B.
 COMMENCED: August 9, 1958 CASING USED: 8-5/8 @ 308' with
 250 sacks
 COMPLETED: August 29, 1958 5-1/2 @ 4880' with
 125 sacks

Sand and Clay	35
Sand	70
Sand and Shale	120
Shale	575
Shale, Shells, Sand	1095
Red Bed	1234
Anhydrite	1259
Shale	1630
Shale & Shells	2210
Lime shale	2330
Lime	2390
Shale and Lime	2545
Lime	2920
Lime and Shale	3120
Lime	4060
Lime and Shale	4180
Shale	4189
Lime	4567
Chert & Lime	4582
Lime	4682
Lime, Shale	4776
Chert and Lime	4815
Chert	4843
Shale and Lime	4551
Lime and Chert	4871
Shale	4895
Shale and Sand	4924
Lime and Sand	4936
Sand & Chert Shale	4060
Sandy Shale	4083
Lime	4995
Total Depth	4995

STATE OF KANSAS
 FEB 25 1959
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

I, the undersigned, being duly sworn on oath, state that the above statement and log are true and a correct record and log of the well drilled at the location above described.

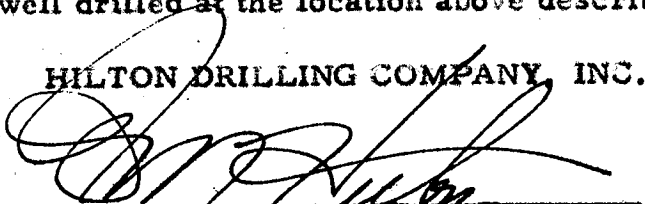HILTON DRILLING COMPANY, INC.

 E. M. Hilton, President

Subscribed and sworn to before me this day of , 1958

Notary Public

PLUGGING
 FILE SEC. 10 T. 27 R. 19W
 BOOK PAGE 146 LINE 6

My commission expires January 26, 1959