

15-051-05368-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Ellis County. Sec. 22 Twp. 11S Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines SW SW NW

Lease Owner Pabco Drilling, Inc. et al

Lease Name Glick Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 4-13 1952

Application for plugging filed 4-24 1953

Application for plugging approved 4-25 1953


Plugging commenced 4-25 1953

Plugging completed 5-1 1953

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

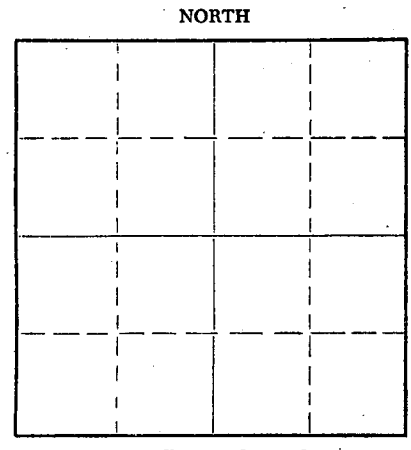

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hy. mud to 300', rock bridge 300-290, 20 sx. cement 290-230,
hy. mud 230-30, Rock bridge 30-20, 10 sx. cement 20 to bottom
of cellar

5-14-53

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pipe Pulling Inc.
Address Stafford, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. PABCO DRILLING, INC.

(Signature) By D.J. Briggs
Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of May, 1953

My commission expires 3-2-57

Ruth M. Endrey
Notary Public.

PLUGGING
FILE SEC 22 T 11 R 16W
BOOK PAGE 96 LINE 7

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-051-05368-0000

Company- PABCO DRILLING CO.
Farm- Glick No. 1

SEC. 22 T. 11 R. 6W
SW SW NW

Total Depth. 3137
Comm. 4-1-52 Comp. 4-13-52
Shot or Treated.
Contractor. Pabco Drilling Co.
Issued. 7-12-52

County Ellis
KANSAS



Elevation. 1850

Production. Pmp. 20 bbls. & no wtr.

CASING:

8 5/8" 1015 cem. w/525 sx.
5 1/2" 3137 cem. w/135 sx.

Figures Indicate Bottom of Formations.

shale & shells	275
shale & sand	300
shale	370
sand	405
shale & shells	610
sand	715
shale & shells	830
shale & red beds	1005
anhyd.	1015
shale, shells & redbeds	1290
shale & red beds	1400
salt & shale	1600
shale & shells	1655
lime & shale	1820
lime	1900
lime & shale	2150
shale & sdy lime	2615
shale & lime	2720
lime	2933
lime & shale	3046
shale	3048
lime	3078
lime & shale	3091
lime	3108
lime	3137
Total Depth	

Tops: Scout	
Topeka	2782
Heebner	3018
Toronto	3037
Lansing	3065

D.S.T. 3013-14

drilled out cem. to 3113 ran SML Rad. log.
& perf. casing w/36 jet shots from 3093-3102. Small show free oil, az. w/3000 gal. thru casing, tested 11-12 gal oil per hr. for 12 hrs. Re-acidized w/1000 gal. testing 26 gal. per hr for 12 hrs. Set plug @ 3050. Perf. 24 jet shots 3038-42. Az. w/1000 gals. Swab thru casing 8 bbl. oil in 14 hrs. Drld. out plug set @ 3050 testing both perforated zones together.

PLUGGING

FILE SEC 22 T 11 R 16W
BOOK PAGE 96 LINE 7

RECEIVED
STATE CORPORATION COMMISSION
APR 29 1953
CONSERVATION DIVISION
Wichita, Kansas