

15-051-03744-0000

WELL PLUGGING RECORD

All Information Completely
Re Acquired Affidavit
File or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ellis County, Sec. 21 Twp. 11S Rge. 16W (X) (W)

Location as "NE/CNW/SW" or footage from lines. C SE NE

Lease Owner Okmar Oil Company

Lease Name George Well No. 1

Office Address 1130 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 11-15-63 19

Application for plugging filed 11-15-63 19

Application for plugging approved 11-15-63 19

Plugging commenced 11-15-63 19

Plugging completed 11-15-63 19

Reason for abandonment of well or producing formation Dry Hole


If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3384 Feet

Show depth and thickness of all water, oil and gas formations.

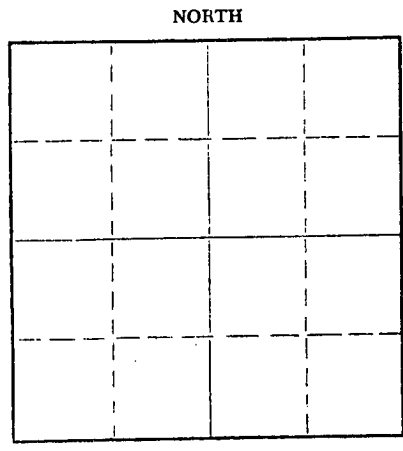

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	190'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

RECEIVED
STATE CORPORATION COMMISSION

NOV 20 1963

CONSERVATION DIVISION
Wichita, Kansas

Plugged hole as follows:

Filled hole with heavy mud. Plugged with dump truck (Sun Cementing)
Plug followed with 125 sacks 60-40 Posmix.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.
Address P. O. Box 486, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

P. O. Box 486, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 18th day of November, 1963

My commission expires April 1, 1967

Ulanda Nichols Notary Public.



DRILLER'S LOG

COMPANY: Okmar Oil Company
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: GEORGE #1
 LOCATION: C SE NE Sec. 21-11S-16W
 ELLIS COUNTY, KANSAS
 COMMENCED: 11-7-63
 COMPLETED: 11-15-63

0	75	Clay & Post Rock
75	190	Shale & Shells
190	420	Shale & Redbed
420	640	Sand
640	940	Redbed & Shale
940	980	Redbed
980	1015	Anhydrite
1015	1385	Shale & Shells
1385	1620	Shale & Lime
1620	2390	Lime & Shale
2390	2700	Shale & Lime
2700	2835	Lime & Shale
2835	3345	Lime
3345	3384	Lime & Chert
	<u>3384</u>	<u>Rotary Total Depth - D. & A.</u>

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 20 1963
 CONSERVATION DIVISION
 Wichita, Kansas

Set 8 5/8" used Surface Casing @190' Cemented with 150 sacks Sunset.

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the George #1 well, located in the Center of the SE NE of Section 21, Township 11 South, Range 16 West, Ellis County, Kansas, as reflected by the files of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 18th day of November, 1963.



Ulanda Nichols
 Ulanda Nichols, Notary Public

My Commission Expires:
 April 1, 1967