

15-167-30168-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Russell County. Sec. 5 Twp. 13S Rge. 14W (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SW SW

Lease Owner Burns Oil Company

Lease Name Foster Well No. 1

Office Address P. O. Box 449, Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 26, 19 66

Application for plugging filed May 26, 19 66


Application for plugging approved May 26, 19 66

Plugging commenced May 26, 19 66

Plugging completed May 26, 19 66

Reason for abandonment of well or producing formation D & A

NORTH

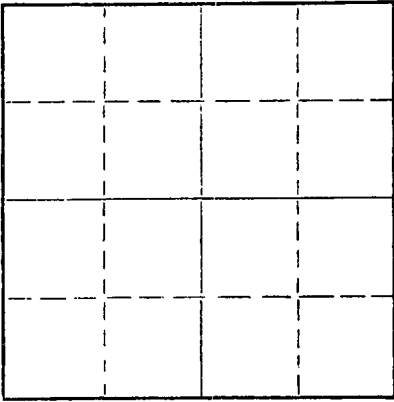

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation Depth to top Bottom Total Depth of Well 3295 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	244'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud to 230', plug, 25
sacks of cement. Filled hole with mud
to 40', 1/2 sack of hulls, plug, 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

JUL 18 1966

07-18-1966
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address Box 173 -- Russell, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Maxine V. Starr (employee of owner) or (owner/representative) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Maxine V. Starr
1720 Wichita Plaza, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of June, 19 66



Jean Heller
Notary Public.

5-22-70

My commission expires

15-167-30168-00-00

DRILLERS LOG

Foster No. 1

CASING RECORD: 8 5/8" @ 244' w/165 sx cement

COMPANY: Burns Oil Company

CONTRACTOR: Red Tiger Drilling Company

COMMENCED: May 20, 1966

COMPLETED: May 26, 1966

DESCRIPTION: SW SW SW
5-13S-14W
Russell Co., Ks.

ELEVATION:

TOTAL DEPTH: 3295'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Lime	0	65	
Shale & Shells	65	225	
Shale	225	510	
Sand	510	525	
Shale & Red Bed	525	844	
Anhydrite	844	875	
Shale & Shells & Red Bed	875	1455	
Shale & Shells	1455	1560	
Lime & Shale	1560	2215	
Shale & Shells	2215	2646	
Lime & Shale	2646	2800	
Lime	2800	3295	

RECEIVED
STATE CORPORATION COMMISSION

JUL 18 1966
07-18-1966
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Maxine V. Starr
Maxine V. Starr

Subscribed and sworn to before me this 1st day of June, 1966.

Jean Hollen
Notary Public

My Commission Expires:

5-22-70

