

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-051-00122-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Ellis County. Sec. 2 Twp. 11S Rge. (E) 17 (W)

Location as "NE/CNW/SW" or footage from lines NW 1/4 - NE 1/4 - NE 1/4

Lease Owner Champlin Refining Company

Lease Name Slimmer Well No. 4

Office Address P.O. Dr. #552 Enid, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed November 21, 19 52

Application for plugging filed November 21, 19 52

Application for plugging approved November 21, (Verbal) 19 52

Plugging commenced November 21, 19 52

Plugging completed November 21, 19 52

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3592 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	202'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 3592' T.D. to 190' and pushed Halliburton plug to 190' and set cement plug using 13 sacks of cement then filled hole with heavy mud from top of cement to 50' and pushed a Halliburton plug to 50' and set cement plug in top using 12 sacks of cement.


RECEIVED
STATE OF KANSAS
NOV 28 1952
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Champlin Refining Company (Co. Rotary)
Address Enid, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
S. P. Hall (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) S. P. Hall
P.O. Box 167, Ellinwood, Kansas
(Address)


SUBSCRIBED AND SWORN to before me this 24th day of November, 19 52
My commission expires September 10, 1955
Notary Public.



24-2675-S 2-52-20M

PLUGGING
FILE SEC 2 T 11 R 1724
BOOK PAGE 62 LINE 2

15-051-00122-00-00
(For use in Kansas only for reporting formation record)

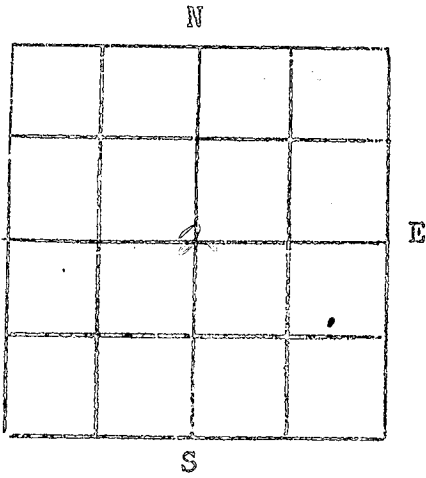

COUNTY Ellis SEC. 2 TWP. 11S RGE. 17W
 COMPANY OPERATING Champlin Refining Company
 OFFICE ADDRESS Box 552 - Enid, Oklahoma
 FARM NAME Slimmer WELL NO. 4
 WELL LOCATED NW/4 NE/4 NE/4 Section 2-11S-17W or
330' from North Line and 990' from East Line NE/4
 CHARACTER OF WELL Dry Hole

DRILLING COMMENCED November 7, 1952 DRILLING COMPLETED November 20, 1952

SIZE	WEIGHT	THDS	MAKE	FT.	INS.	AMOUNT PULLED	CEMENT
8-5/8"	28#	8 Rd	National Tube	206.66			125 sacks

FORMATION RECORD

	<u>TOPS</u>	<u>BOTTOM</u>		<u>TOPS</u>	<u>BOTTOM</u>
Shale-Shells	0	203	Geological Tops:		
Shale-Sand-Iron	203	965	Anhydrite	1205	
Shale-Shells	965	1205	Topeka	2927	
Anhydrite	1205	1245	Heebner	3154	
Shale-Redbed	1245	1330	Toronto	3177	
Shale-Shells-Salt	1330	1545	Lansing-K.C.	3198	
Shale-Shells	1545	1745	Base K. C.	3439	
Shale-Lime-Shells	1745	1903	Conglomerate	3482	
Shale-Lime	1903	2420	Simpson	3532	
Shale-Lime	2420	2955	Arbuckle	3584	
Lime	2955	3009	Elevation: 1998' D.F.		
Shale-Lime	3009	3085			
Lime	3085	3152			
Shale-Lime	3152	3207			
Lime	3207	3278			
Shale-Lime	3278	3307			
Lime	3307	3349			
Shale-Lime	3349	3430			
Shale-Lime-Congl.	3430	3477			
Shale-Sand-Chert	3477	3492			
Shale-Lime-Chert	3492	3530			
Chert	3530	3582			
Lime	3582	3592 T.D.			

STATE OF KANSAS
 12-9-1952
 DEC - 9 1952

CONSERVATION DIVISION
 Wichita, Kansas

Herbert W. ...
 Superintendent

Subscribed and sworn to before me
 this 8 day of December, 1942

Don ...
 Notary Public

My Commission Expires August 14, 1954

PLUGGING
 FILE SEC 2 T 11 R 17W
 BOOK PAGE 62 LINE 2