

15-051-01563-00-00
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Ellis County, Sec. 5 Twp. 11 Rge. (E) 17 (W)

Location as "NE/CNW/SW" or footage from lines SE NE NW

Lease Owner A. Scott Ritchie

Lease Name Gumble Well No. 1-A

Office Address 352 N. Broadway, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed March 29, 1963

Application for plugging filed March 29, 1963

Application for plugging approved March 29, 1963

Plugging commenced March 29, 1963

Plugging completed March 29, 1963

Reason for abandonment of well or producing formation


If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3561 Feet

Show depth and thickness of all water, oil and gas formations.

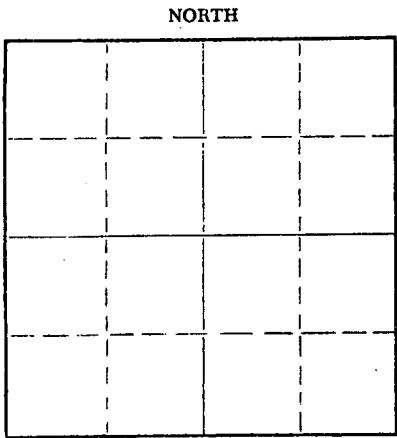

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	263'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug & 1/4 sx. hulls w/20 sx. cement @ 480'. Heavy mud to 240'-plug and 1/4 sx. hulls & 20 sxs. cement. Mud to 35' - plug & 1/4 sx. hulls w/10 sxs. cement.

RECEIVED
STATE CORPORATION COMMISSION
4-5-1963
APR 5 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Glickman Oil Company

Address P. O. Box 3104, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Milton Glickman (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Milton Glickman*

(Address)

SUBSCRIBED AND SWORN to before me this 3rd day of April, 1963

My commission expires November 19, 1963

Lorella Schauf
Lorella Schauf Notary Public.



GLICKMAN OIL COMPANY

P. O. Box 3108
Wichita, Kansas

15-051-01563-0000

DRILLERS WELL LOG

A. Scott Ritchie

Company: ~~Glickman Oil Company~~

Location: SE NE NW
Sec. 5-11-17W
Ellis County, Kansas

Farm: Gumble Well No. 1-A

Commenced: 3-22-63

Elevation: 1989 K. B.

Completed: 3-29-63

Total Depth: 3561'

Casing: Set 8 5/8 @ 263' w/150 sxs.

Production: D & A

Geologist: Scott Ritchie

Figures Indicate Bottom of Formations

263	Cement		
620	Shale & Red Bed		TOPS
690	Pyrite Strks.		
741	Shale	Anhydrite	1226
890	Sand	Topeka	2937
1226	Red Bed & Shale	Heebner	3166
1259	Anhydrite	Toronto	3186
1310	Red Bed	Lansing	3210
1680	Shale	Arbuckle	3554
1950	Shale & Lime		
2250	Lime & Shale		
2435	Shale & Lime		
2685	Lime & Shale		
2938	Shale & Lime		
3030	Lime		
3045	Lime & Shale		
3550	Lime		
3554	Cherty Shale		
3561	Arbuckle		

RECEIVED
STATE CORPORATION COMMISSION
4-5-1963
APR 5 1963
CONSERVATION DIVISION
WICHITA, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss:

I, Milton Glickman, of the Glickman Oil Company, upon oath state that the above and foregoing is a true and correct copy of the log of the Gumble #1 - A

Milton Glickman
Milton Glickman

Subscribed and sworn to before me this 3rd day of April, 1963

Lorella Schauf
Lorella Schauf Notary Public

My Commission Expires: November 19, 1963