


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

**WELL PLUGGING RECORD**

NORTH

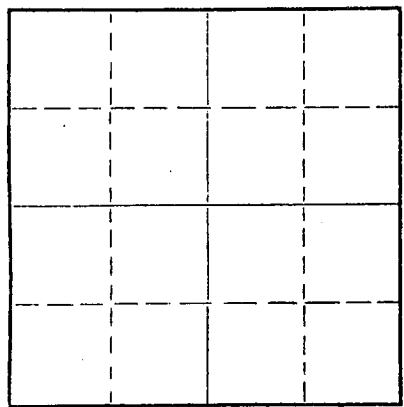

Locate well correctly on above  
Section Plat

Barber County. Sec. 23 Twp. 32 Rge. 13 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines SW NW NW  
Lease Owner Morgenstern & Spector  
Lease Name Brooks Younger #1 Well No.  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed JUNE, 1955 19  
Application for plugging filed December 15, 1960 19  
Application for plugging approved December 16, 1960 19  
Plugging commenced 1-7-60 19  
Plugging completed 1-12-60 19  
Reason for abandonment of well or producing formation failure to produce profitably  
If a producing well is abandoned, date of last production December 1959  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel  
Producing formation Mississippi Depth to top Bottom Total Depth of Well 4975 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	390'	none
				5-1/2"	4518'	3057'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked the hole to 4975' and found it open.  
Filled w/sand to 4400' and dumped 5 sacks of cement with bailer. Pulled 5 1/2" casing.  
Cleared hole and bailed fluid to 300', set rock bridge to 290' and dumped 20 sacks of cement. Mudded the hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING CO MPLETED

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 3 1960  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Knight Casing Pulling Co.  
Address Chase, Kansas

STATE OF KANSAS COUNTY OF RICE, ss.  
I, Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight  
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 25th day of January, 1960

Thomas V. Dwyer  
Notary Public.

My commission expires 9-27-62



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

COPY


Company- LION OIL CO.  
Farm- Brooks-Younger No. 1

SEC. 23 T. 32 R. 13W  
SW NW NW

Total Depth. 4975  
Comm. 5-3-55 Comp. 5-26-55

County Barber  
KANSAS

Shot or Treated.  
Contractor. Graham-Messman-Rinehart Drilling Co.  
Issued. 12-24-55



CASING:  
8 5/8 @ 359' w/ 275 sx cmt.  
5 1/2 @ 4520' w/ 200 sx cmt-

Elevation. 1663 KB

Production. 41 BOPD

Figures indicate Bottom of Formations.

red bed & shale	313
shale	372
red bed & shale	1202
lime & shale	3732
lime, shale & sand	3830
lime & shale	3968
lime	4155
lime & chert	4181
lime	4397
lime & chert	4406
chert	4426
lime & chert	4446
chat	4474
Mississippi	4499
lime & shale	4570
Mississippi	4694
lime	4813
lime & chert	4835
lime	4975
Total Depth	

RECEIVED  
STATE CORPORATION COMMISSION

DEC 15 1959

CONSERVATION DIVISION  
Wichita, Kansas

SCOUT TOPS:	
Douglas sand	3772
Lansing	3898
Mississippi chat	4390
Kinderhook	4656
Simpson sand	4868
Arbuckle	4956