

15-167-19342-00-00

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Russell County, Sec 18 Twp 13S Rge. (E) 14 (W)

Location as "NE/CNW&SW" or footage from lines C NE SE NW

Lease Owner Rains & Williamson Oil Co.

Lease Name HERMAN KRUG Well No. 1

Office Address 1425 Wichita Plaza, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 15 1964

Application for plugging filed October 15 1964

Application for plugging approved October 15 1964


Plugging commenced October 15 1964

Plugging completed October 15 1964

Reason for abandonment of well or producing formation no oil or gas found
in commercial quantities.

If a producing well is abandoned, date of last production - - - - - 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

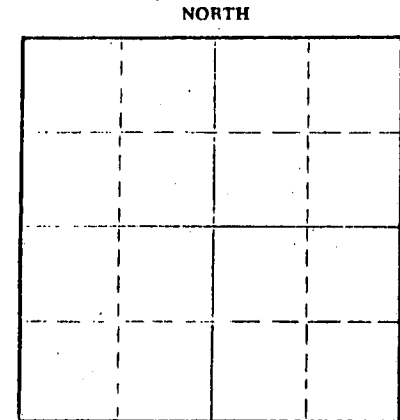

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truman

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3180 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	218'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud back to 210', set plug & hulls thru drill pipe with 25 sacks cement, mud back to 40', set plug & hulls. Capped with 10 sacks cement. 2 sacks cement in rathole. Plug down 10:30 a.m. 10-15-64.

RECEIVED
STATE CORPORATION COMMISSION

OCT 21 1964

10-21-1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co.

Address 1425 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Wilson Rains (employee or owner) or (owner or operator)

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains


Wilson Rains

1425 Wichita Plaza Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 19th day of October, 1964

January 8, 1968

Shirley Keck Notary Public.



15-167-19342-00-00

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co. Contractor: Rains & Williamson Oil Co.
 No. 1 HERMAN KRUG Commenced: 10-6-64
 C NE SE NW Sec. 18-13S-14W Completed: 10-15-64
 Russell County, Kansas Remarks: Set 218' 8-5/8" surface casing with 145 sacks cement.

FORMATIONS:

Surface Soil and Clay	40'
Shale	219'
Shale & Shells	335'
Sand & Pyrite	480'
Shale & Red Bed	775'
Anhydrite	807'
Shale & Shells	1075'
Shale & Lime Shell	1400'
Shale & Lime Streaks	1620'
Lime & Shale	1770'
Lime	2045'
Lime & Shale	2205'
Shale	2290'
Shale & Lime Streaks	2460'
Shale & Lime	2696'
Lime & Shale	2770'
Lime	2995'
Lime & Shale	3055'
Lime	3180'
Rotary Total Depth (D&A)	3180'

RECEIVED
STATE CORPORATION COMMISSION

OCT 21 1964
10-21-1964
CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains
Wilson Rains, Partner

Subscribed and sworn to before me, a Notary Public in and for the State of Kansas, County of Sedgwick, this 19th day of October, 1964.

My Commission Expires:
January 8, 1968

Shirley Keck
Shirley Keck, Notary Public

