

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Meade County, Sec. 34 Twp. 33S Rge. (E) 25 (W)

Location as "NE/CNW%SW%" or footage from lines C SW SW

Lease Owner Sunray Mid-Continent Oil Company

Lease Name Rexroad Well No. 2

Office Address Box # 1878, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 15, 19 59

Application for plugging filed June 26, 19 59

Application for plugging approved June 29, 19 59


Plugging commenced July 25, 19 59

Plugging completed July 31, 19 59

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

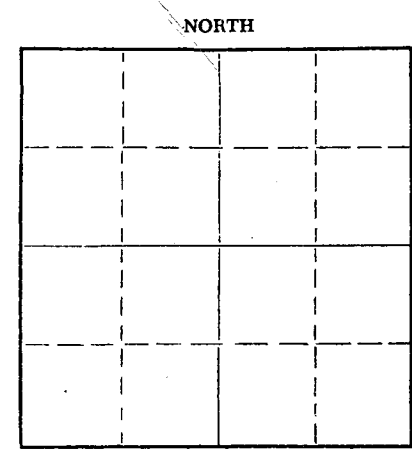

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Merle A. Rives

Producing formation Depth to top Bottom Total Depth of Well 5955 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1392'	None
				5 1/2"	5954'	4627'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Log Attached.

Set 20 sacks cement @ 5940', Pulled 4627' 5 1/2" csg. Mixed 25 sax control gel & circulate, bailed down to 600' & ran 20 sax cement. filled with mud, set 10 sax cement to top of 8 5/8" & weld steel plate on top. Plugging completed.

RECEIVED
STATE CORPORATION COMMISSION

AUG 5 1959
08-05-59

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Toland & Reeves
Address Oklahoma City, Okla.

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. A. McCowan (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. A. McCowan
Box # 1878, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 4 day of Aug., 19 59

My commission expires July 13, 1963

W. M. Montgomery
Notary Public.

PLUGGING 29
FILE SEC 34 T. 33R
BOOK PAGE 47 LINE 22