

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 7 Twp. 11S Rge. 17 (X) W (W)

Location as "NE/CNW/SE/SW" or footage from lines C S/2 NW/4 NE/4

Lease Owner Pan American Petroleum Corporation AABRC

Lease Name Henderson "A" Well No. 4

Office Address P. O. Box 1654, Oklahoma City, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 1-28-40 19

Application for plugging filed 2-28-61 19

Application for plugging approved 4-3-61 19


Plugging commenced 6-15-61 19

Plugging completed 6-19-61 19

Reason for abandonment of well or producing formation Economically depleted

If a producing well is abandoned, date of last production December 19 59

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

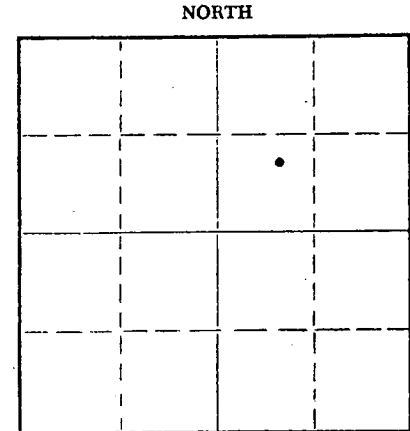

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty

Producing formation Arbuckle Depth to top 3428 Bottom 3430 Total Depth of Well 3468 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Arbuckle	Oil Depleted			15 1/2"	45'	0
				10"	1150'	0
				7"	3425'	1949'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 810' - 52 sx. cement
- 810-435 - 25 sx. cement
- 435 - base of cellar - 10 sx. cement

RECEIVED
STATE CORPORATION COMMISSION
JUN 26 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Company
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) [Signature]

P. O. Box 548, Ellinwood, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 23rd day of June, 1961

[Signature]
Notary Public.

My commission expires January 9, 1965



THE DICKEY OIL COMPANY
 HENDERSON-A #4 WELL

COMMENCED: 1/2/40
 COMPLETED: 1/28/40

C-S/2 NW/4 NE/4 7-11-17
 Ellis County, Kansas
 ELEVATION: 1878

Pipe Record

45'	15½"
1150'	10"
3425'	7"

shale	80
shale and shells	240
sand	260
shale	320
shale and shells	542
shale	575
sand	610
shale	785
red bed	1130
anhydrite	1165
shale	1435
salt	1632
shale and shells	1756
broken lime	2025
lime	2155
broken lime	2193
lime	2255
broken lime	2405
lime and shale	2465
broken lime	2511
shale	2729
shale and shells	2815
top Topeka	2815
lime	3100
broken lime - Top K.C.	3120
lime	3355
red bed	3395
lime and shale	3415
green shale	3425
top Siliceous	3425
Siliceous lime	3426
T.D.	3426

RECEIVED
 STATE CORPORATION COMMISSION

JUN 26 1961

CONSERVATION DIVISION
 Wichita, Kansas