


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027

Wichita, Kansas 67217  
NORTH

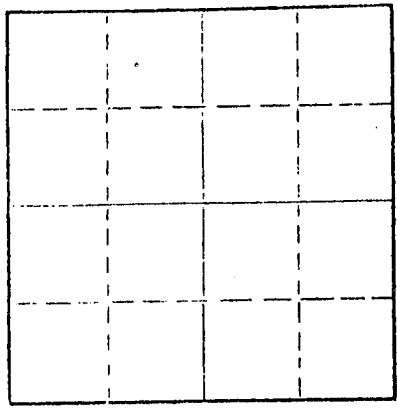

Locate well correctly on above  
Section Plat

Ellis County, Sec. 7 Twp. 11 Rge. 17 (E) (W) X  
Location as "NE/CNW/SW" or footage from lines S/2-NE/NW  
Lease Owner Sun Oil Co.  
Lease Name HENDERSON #5 Well No. 5  
Office Address P. O. Box 67 Hays, Kansas 67601  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced February 13, 19 74  
Plugging completed February 19, 19 74  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation Depth to top Bottom Total Depth of Well 3550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				16"	120	None
				10 3/4"	1195	None
				7"	3483	2337.96'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed a plug to 3455'. Dumped 10' of sand and 5 sacks cement.  
Shot casing at 2360'. Pulled a total of 75 joints of 7" casing.  
Pushed a plug to 450' and built a rock bridge. Plugged well with  
8 yds. readymix concrete.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 26 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Rockhold Engineering, Inc.  
Address P. O. Box 698 Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.  
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
James W. Rockhold  
Box 698 Gt. Bend, Ks. 67530  
(Address)

CATHY MILLER  
NOTARY PUBLIC  
Barton County, Ks.  
Subscribed and Sworn to before me this 25th day of February, 19 74

My commission expires September 30, 1975  
Cathy Miller Notary Public


WELL LOG BUREAU - KANSAS GEOLOGICAL SURVEY  
412 Union National Bank Bldg, Wichita, Kansas

DARBY PETRO. CORP.  
Henderson No. 5

SEC. 7 T. 11 R. 17W.  
CS 1/2 NE NW

Total Depth. 3493  
Comm. 1-16-40 Comp. 2-4-40  
Shot or Treated. 1500 gal acid.  
Contractor.  
Issued. 3-9-40

County Ellis.



CASING.

15" 120'  
10" 1195'  
7" 3483' Ctd.

Elevation.

Production. Pot. 2591B.

Figures Indicate Bottom of Formations.

sand shale and shells	120
shale and sand	450
shale and iron	720
sand	865
red rock	1110
red rock and shale	1190
anhydrite	1228
shale	1540
salt	1640
shale	1815
lime and shale	2925
lime	3195
lime and shale	3275
lime	3440
shale and lime	3484
Arbuckle lime	3485 1/2
3485 1/2 equals 3484 1/2	
lime	3493.

RECEIVED  
STATE CORPORATION COMMISSION  
DEC 14 1973  
CONSERVATION DIVISION  
Wichita, Kansas

Total Depth.

Top of Arbuckle 3483  
Drilled cement 3483 SFO  
drilled deeper 3483-89  
300' OIH - 30 Min.  
Drilled deeper 3493  
1500' OIH 3 1/2 hrs.  
Pay 3486-92