


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

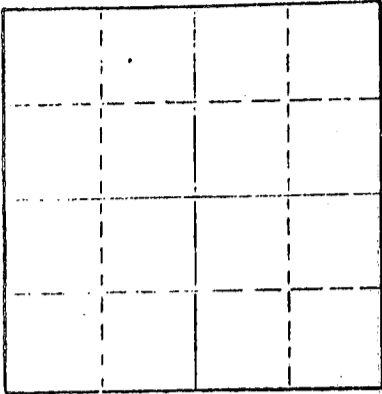

Locate well correctly on above  
Section Plat

Ellis County, Sec. 7 Twp. 11S Rge. 17W (E) (W)  
Location as "NE/CNWSW" or footage from lines C W/2 SE SE  
Lease Owner Clinton Oil Company  
Lease Name Stein #5 Well No. 5  
Office Address Great Bend, Kansas 67530  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed 3-23 1974  
Application for plugging filed 8-30 1974  
Application for plugging approved 9-3 1974  
Plugging commenced 10/1/74 10-1 1974  
Plugging completed 10/4/74 10-4 1974  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production Before acquiring 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3402 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				16"	71	none
				10-3/4"	1110	none
				7"	3400	2290'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole, pushed plug to 3326' with sand and 5 sacks cement.  
Shot pipe at 2496', 2399', 2303', pulled 76 joints. Set rock bridge from 410 to 400' and ran 8 yards ready mix.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 31 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of October, 19 74

Margaret Melcher  
Notary Public.

My commission expires \_\_\_\_\_  
MARGARET MELCHER  
NOTARY PUBLIC  
Rice County, Kansas  
My Commission Expires  
Feb. 15, 1975



THE DICKEY OIL COMPANY  
Stein No. 5

COMMENCED: 3-2-41  
COMPLETED: 3-23-41

LOCATION: C-W $\frac{1}{2}$  SE $\frac{1}{4}$  SE $\frac{1}{4}$  7-11-17  
Ellis County, Kansas  
ELEVATION:

## Casing Record

70'8"	15"
1110'	10"
3372'	7"

## LOG FROM DRILLING REPORTS

sand - red bed	69
lime shell	70
shale & shells	210
shale	515
iron	540
shale	595
sand	740
red rock	1085
Top Anhydrite	1085
Anhydrite	1120
red rock & shale	1335
shale	1645
shale & shells	1790
broken lime	1830
shale	1965
lime	2065
broken lime	2115
lime	2155
broken lime	2295
shale	2335
lime	2360
shale	2385
lime	2400
broken lime	2420
shale	2685
broken lime	2725
shale	2777
lime	3057
broken lime	3085
shale	3103
lime	3291
shale	3300
red rock	3315
lime	3338
conglomerate	3348
dolomite	3374
Top Arbuckle	3374
Arbuckle	3382 T.D.
(Top Arbuckle corrected D.F.)	3372)