

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County, Sec. 8 Twp. 11 Rge. 17 (E)W (W)

Location as "NE/CNW%SW%" or footage from lines SW NW NW

Lease Owner Great Bend Pipe & Supply Company, Inc.

Lease Name Gumble Well No. 3

Office Address Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 4-30-64 19

Plugging completed 5-6-64 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

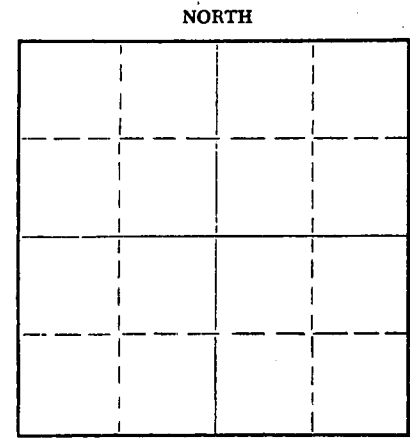

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty

Producing formation Depth to top Bottom Total Depth of Well 3416 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PU. IN	PULLED OUT
				8-5/8"	830'	None
				5-1/2"	3414'	2208'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom previously plugged off with sand. Checked hole and pumped 12 sacks of gel mud and 12 sacks of weight mud down surface pipe. Pulled 5 1/2" casing to 800' and pumped in 18 sacks of gel mud. Pulled 5 1/2" casing to 475' and pumped in 35 sacks of cement. Pulled 5 1/2" casing to 200' and pumped in 25 sacks of cement. Pulled balance of 5 1/2" casing and capped well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
05-12-64
MAY 12 1964

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 8th day of May, 1964

Milton J. Volin Notary Public.

My commission expires May 20, 1964

WELL LOG RUBEN KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg. Wichita, Kansas

15-051-02132-0000


Company - PHIL-HAN OIL CO.
Farm - Gumble No. 3

SEC. 8 T. 11 R. 17W
SW NW NW

Total Depth. 3417'
Comm. 9-19-48 Comp. 10-1-48
Shot or Treated.
Contractor. A-B-W Drlg. Co., Inc.
Issued. 11-27-48

County. Ellis

KANSAS



Elevation. _____

Production. Est. 75 Bbls.

Figures Indicate Bottom of Formations.

surface clay & sand	110
shale & shells	475
shale & sand	600
sand & shells	770
shale	815
red rock	825
red bed	1110
anhydrite	1147
red bed & shells	1385
shale & shells	2110
lime & shale	3280
lime	3355
lime & shale	3395
shale	3415
arbuckle	3417
Total Depth	

Tops:

Heebner	3045
Lansing	3098
Donglomerate	3356
Simpson	3384
Arbuckle	3413

RECEIVED
STATE CORPORATION COMMISSION

MAY 7 1964

CONSERVATION DIVISION
Wichita, Kansas