


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County. Sec. 28 Twp. 11 Rge. 16 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines SE NW SW  
Lease Owner Tomlinson-Kathol, Inc.  
Lease Name Nielson Well No. 1  
Office Address Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19\_\_\_\_  
Application for plugging filed 19\_\_\_\_  
Application for plugging approved 19\_\_\_\_  
Plugging commenced 11-8-64 19\_\_\_\_  
Plugging completed 11-21-64 19\_\_\_\_  
Reason for abandonment of well or producing formation Depleted.

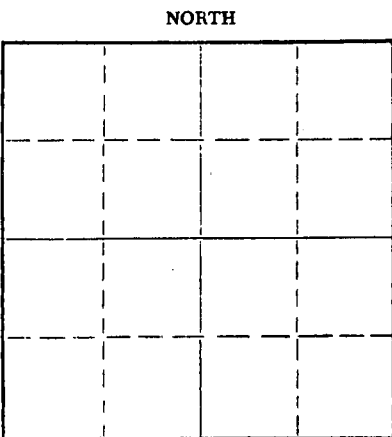

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3400 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	155'	None
				5-1/2"	3400'	2750'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked hole to plug back @ 3338', sanded hole to 3320' and dumped 4 sacks of cement @ 3320' with dump bailer. Pulled 5 1/2" casing to 550' and ~~circulated~~ circulated surface pipe with 32 sacks of gel mud. Pulled 5 1/2" casing to 400' and pumped in 25 sacks of cement @ 400'. Pulled 5 1/2" casing to 180' and pumped in 25 sacks of cement @ 180'. Pulled balance of 5 1/2" casing and capped well with 10 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 30 1964

CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Noel J. Knight*  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of November, 1964

My commission expires May 20, 1968  
*Milton J. Vlin*  
Notary Public.

15-051-00296-0000

DRILLERS LOG  
TOMLINSON-KATHOL, INC.  
# 1 NIELSEN  
SE NW SW, SEC. 28-118-16W  
ELLIS COUNTY, KANSAS

Contractor - Tomlinson-Kathol, Inc.

Commenced: 1/26/59  
Completed: 2/5/59  
Elevation: 1799 KB

<u>From</u>	<u>To</u>	<u>Description</u>	<u>Remarks</u>
0	55	Sand	
55	242	Shale	159' .8-5/8" cemented w/140 sac cement
242	429	Shale & Clay	
429	632	Shale & Shells	
632	780	Shale	
780	830	Dakota Sand	
830	972	Shale	
972	1160	Shale & Shell	
1160	1731	Shale	
1731	2133	Shale & Lime	
2133	2260	Lime	
2260	2508	Shale & Lime	Anhydrite 963
2508	2655	Shale	Heebner 2972
2655q	2885	Shale & Lime	Toronto 2994
2885	2956	Lime & Shale	Lansing 3021
2956	3035	Lime	Base Kansas City 3268
3035	3073	Shale & Lime	Basal Penn Sd 3304
3073	3325	Lime	Simpson Shale 3316
3325	3400	Arbuckle	Simpson Sand 3322
3400		Rotary Total Depth	Arbuckle 3327
			5-1/2" 3400

RECEIVED  
STATE CORPORATION COMMISSION

JAN 4 1959

CONSERVATION DIVISION  
Wichita, Kansas

I certify to the best of my knowledge and belief, the above represents a true and accurate Driller's Log record of the captioned well.

Warren E. Tomlinson

State of Kansas )  
County of Sedgwick )

Subscribed and sworn to before me this 25th day of February, 1959.

Notary Public

My Commission Expires Jan. 19, 1961.