


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Russell County, Sec. 21 Twp. 13 Rge. 13 # (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE-SW-NE
Lease Owner Fred J. Haynes
Lease Name Fred J. Haynes Well No. 1
Office Address Building & Loan Building Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed 12-6-55 19.
Application for plugging filed 12-6-55 19.
Application for plugging approved 12-8-55 19.
Plugging commenced 12-8-55 19.
Plugging completed 12-9-55 19.
Reason for abandonment of well or producing formation.

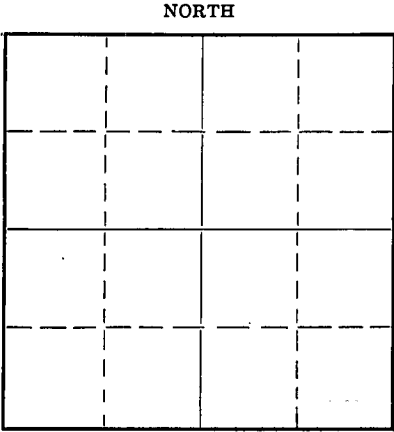

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19.
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Milton Galyardt
Producing formation..... Depth to top..... Bottom..... Total Depth of Well 3245 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	185	200	12	398	398
Sand	Water	260	280	10	677	677
				8	2294	2294
				7	2768	2768
				5	3160	3160

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Pulled 10" casing - filled hole with mud - pulled 12" to 260' - set bridge plug and Cemented with 50 sacks cement.
Filled hole with mud and set bridge plug at 30' - Cemented to surface with 30 sacks cement.

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to Fred J. Haynes
Address Building & Loan Building Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
Darrell E. Haynes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Darrell E. Haynes
Russell, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 12th day of December, 1955

Marguerite Beyond Notary Public.



PLUGGING
SEC 21 T 13 R 13W
PAGE 22 LINE 28

12-14-1955



Start: Sept. 14, 1955
Comp: Sept. 6, 1955
Dec

FRED J. HAYNES

BUILDING & LOAN BUILDING

RUSSELL, KANSAS

I.P. D & A

HAYNES # 1
SE-SW-NE
21-13-13
Russell county, Kansas

Shale 185
Sand 200
Shale 260
Sand 280
Shale 390
Red Rock 674
Lime 715
Shale 1050
Salt 1325
Shells 2565
Lime 2833
Shale 2835
Shells 2895
Lime 3185
Cong 3245
Total Depth 3245

Casing

12' -398
10 -677
8 -2294
7 -2768
5 -3160

TOPS

Anhydrite - 674
Topeka - 2565
Heebner - 2833
Kansas City - 2895
Cong - 3185

Shows

None

PLUGGING
FLY SEC 21 T 13 R 13 W
BOOK PAGE 22 LINE 28

STATE OF KANSAS
OIL & GAS COMMISSION
REC. 14 1955
6-14-1955
CONSERVATION DIVISION
Wichita, Kansas