


15-007-116669-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
11 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

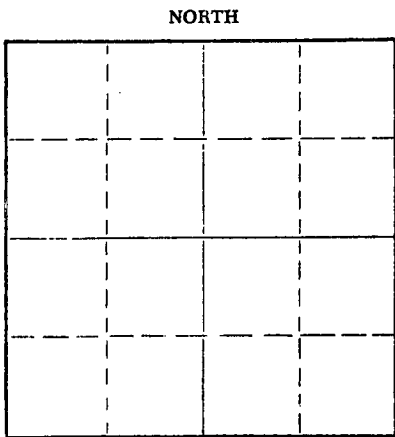

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well ARCHIE ELVING
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4604 Feet
Show depth and thickness of all water, oil and gas formations.

Barber County. Sec. 20 Twp. 37 Rge. 13W (E) (W)
Location as "NE/CNW/SW" or footage from lines CNW SW
Lease Owner J C Bennett
Lease Name TEDROW Well No. 1
Office Address 1212 UNION NAT'L Bldg WICHITA, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed 9-16-61 19_____
Application for plugging filed 8-19-65 19_____
Application for plugging approved 8-19-65 19_____
Plugging commenced 8-30 1965
Plugging completed 9-2 1965
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19_____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Mississippi</u>	<u>8"</u>	<u>0</u>	<u>291</u>			<u>0</u>
		<u>0</u>	<u>4603</u>	<u>5 1/2"</u>	<u>4603</u>	<u>3673-</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sand back from 4567 to 4527 - Dump 5
Saf Cement - Pull 3673 ft 5 1/2" pipe - mud hole
to 275 ft - 15 ft rock bridge to 260 ft - Dump
4 yds ready mix Cement from 260 ft to surface

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Ralph Constock Pipe Pulling
Address Stafford, Kansas Permit # 490

STATE OF Kansas COUNTY OF Sedgewick, ss.


Jack Shear (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack Shear

(Address) _____

SUBSCRIBED AND SWORN to before me this 2nd day of September, 1965

My commission expires June 3, 1967 Jarvis L. Penber Notary Public.



15-907-16669-00-00

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas

Company. SUNRAY MID-CONTINENT OIL CO
Farm. Tedrow No. 1

SEC. 20 T. 32 R. 13W
C NW SW

Total Depth. 4604'
Comm. 8-31-61 Comp. 9-16-61
Shot or Treated.
Contractor. Moran Drlg. Co.
Issued. 6-23-62

County Barber
KANSAS



CASING:
8" 291'
5" 4603'

Elevation. 1827'

Production. 98 BOPD

Figures Indicate Bottom of Formations.

red bed & shale	1123
red bed	1192
shale	1723
lime & shale	2624
shale	3065
shale & lime	4071
lime	4604
Total Depth	

TOPS: SCOUT	
Lansing	4056
Massey	4514
Mississippi	4530

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1965

CONSERVATION DIVISION
Wichita, Kansas