


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-167-00120-00-00

WELL PLUGGING RECORD

NORTH

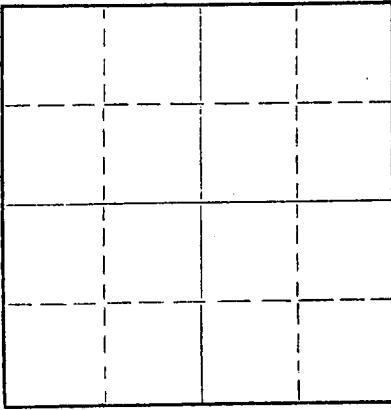

Locate well correctly on above Section Plat

Russell County, Sec. 20 Twp. 13S Rge. 14 (E) W (W)  
Location as "NE/CNW%SW%" or footage from lines NW NW NE  
Lease Owner Franco Central Oil Company  
Lease Name Driscoll Well No. 1  
Office Address Fourth National Bank Bldg. Wichita  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed February 15 19 59  
Application for plugging filed February 15 19 59  
Application for plugging approved February 15 19 59  
Plugging commenced February 15 19 59  
Plugging completed February 15 19 59  
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	298*	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud. Set bottom plug @ 295\* w/25 sx cement and 1/4 sx hulls. Filled with heavy mud. Set top plug @ 40\* w/10 sx cement and 1/2 sx hulls. Filled to base of cellar.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company  
Address Box 173 - Russell, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss. George A. Angle

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Angle  
580 Fourth Nat'l Bank Bldg. - Wichita  
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of February, 19 59

Maxine Head

Notary Public.

My commission expires 11-17-62

PLUGGING  
FILE SEC 20 T 13 R 14 W  
BOOK PAGE 19 LINE 10

15-167-00120-00-00

DRILLERS LOG

No. 1 Driscoll

CASING RECORD: 8 5/8" @ 298\* w/150 sx cement  
 COMPANY: Franco Central Oil Co.  
 CONTRACTOR: Red Tiger Drilling Co.  
 COMMENCED: February 7, 1959  
 COMPLETED: February 15, 1959

DESCRIPTION: NW NW NE  
 20-13S-14W  
 Russell County,  
 Kansas

TOTAL DEPTH: 3278\*  
 ELEVATION:

FORMATION	FROM	TO	REMARKS
Post Rock and Soil	0	130	
Shale	130	343	
Hard Sand	343	365	
Hard Sand and Pyrite	365	400	
Sand and Shells	400	500	
Red Bed and Shale	500	850	
Anhydrite	850	890	
Shale and Shells	890	1480	
Lime and Shale	1480	1835	
Lime	1835	1980	
Shale and Lime	1980	2230	
Shale and Shells	2230	2455	
Shale and Lime	2455	2709	
Lime	2709	3260	
Arbuckle	3260	3278	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

*George A. Angle*  
 \_\_\_\_\_  
 George A. Angle

Subscribed and sworn to before me this 17th day of February, 1959.

*Marnie Head*  
 \_\_\_\_\_  
 Notary Public

My Commission Expires:  
 \_\_\_\_\_  
 11-17-62

RECEIVED  
 STATE COMMISSION  
 FEB 19 1959  
 00-19-1959  
 CONSERVATION DIVISION  
 Wichita, Kansas

PLUGGING  
 FILE SEC. 20 T. 13 R. 14 W  
 BOOK PAGE 19 LINE 10