

15-167-20558-00-00

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Russel County, Sec 23 Twp. 13 Rge. (E) 14(W)

Location as "NE/CNWSWZ" or footage from lines SE SE SE

Lease Owner Jett Drilling Co.

Lease Name Krug Well No. 2

Office Address 514 One Twenty Bldg. Wichita

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 10/30 1972

Application for plugging filed 9/24 1975

Application for plugging approved 10/5 1975


Plugging commenced 10/2 1975

Plugging completed 10/17 1975

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 9/30 1975

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

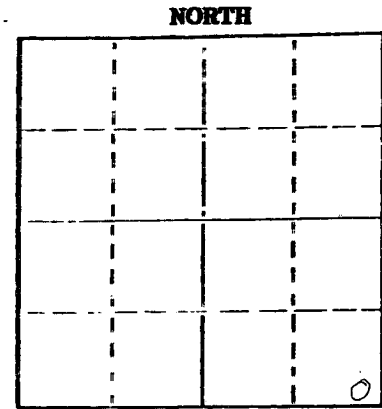

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Duane Rankin

Producing formation Arbuckle Depth to top 3285 Bottom 3290 Total Depth of Well 3290

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	263	8 5/8		
		0	3286	5 1/2		1880

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand to 3250 and Dump 5 sx. cement

Mix 2sx. hulls 25sx. jell 1sx. hulls And 200 sx. 50 50 Pozmix cement Pumped in with Allied cementers

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Nicholas Casing Pulling

Address Box 373 Geneseo Kansas 67444


STATE OF _____ COUNTY OF _____ ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George A. Nicholas

SUBSCRIBED AND SWORN TO before me this 20 day of October 1975

My commission expires August 25, 1979



Mark M. Wanklyn Notary Public

OCT 21 1975
10-21-1975

15-167-20558-00-00

Operator: Jet Drilling Company, Inc.
514 - 120 Building
Wichita, Kansas 67202
Name: Krug #2
Commenced: 8-21-72
Completed: 8-29-72
Contractor: Shields Drilling Company, Inc.
P. O. Box 709
Russell, Kansas
Casing Record: Set 8-5/8" @ 263' w/175 sacks

Description: SE SE SE
23-13S-14W
Russell County, Kansas
Elevation: 1,836' K.B.
Production: Oil

DRILLER'S LOG

0'	-	200'	Top soil, clay rock, gravel
200'	-	365'	Rat hole shale & sand
365'	-	481'	Sand & shale
481'	-	740'	Shale & redbed
740'	-	850'	Redbed & shale
850'	-	885'	Anhydrite
885'	-	1,520'	Shale & shells
1,520'	-	1,895'	Lime & shale streaks
1,895'	-	2,068'	Lime & shale
2,068'	-	2,230'	Lime & shale streaks
2,230'	-	2,480'	Shale & Lime streaks
2,480'	-	2,710'	Shale & Shells
2,710'	-	2,732'	Lime & Shale
2,732'	-	2,898'	Lime
2,898'	-	2,998'	Lime & shale
2,998'	-	3,290'	Lime
		3,290'	T. D.

RECORDED
INDEXED
09-25-1975
COUNTY CLERK
WICHITA, KANSAS

STATE OF KANSAS)
)SS
County of Sedgwick)

Arthur M. Scott, employee of owner and operator of the above described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

Signature _____
514 One Twenty Bldg., Wichita, Ks.

SUBSCRIBED AND SWORN to before me this 14th day of September, 1972.

My commission expires March 22, 1975

Carolyn V. Buxton, Notary Public