

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Russell County, Sec. 9 Twp. 13 Rge. 15W ~~EW~~  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines \_\_\_\_\_

NE SW SW

Lease Owner Shields Oil Producers, Inc.

Lease Name Niedenthal "C" Well No. 2

Office Address Shields Bldg., Russell, Kansas 67665

Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Dry hole

Date Well completed 8-2 1982

Application for plugging filed 8-2 1982

Application for plugging approved 8-2 1982

Plugging commenced 8-2 1982

Plugging completed 8-2 1982

Reason for abandonment of well or producing formation \_\_\_\_\_

Dry hole


If a producing well is abandoned, date of last production 19 \_\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Scheck

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 13,225'

Show depth and thickness of all water, oil and gas formations.

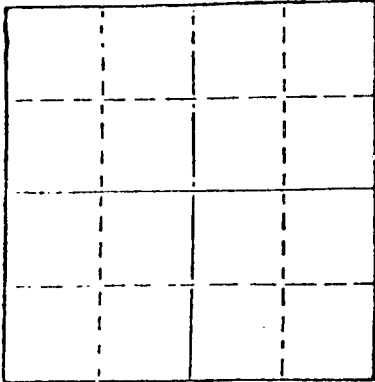

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	275'	Cmtd. w/160 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Fill hole w/heavy mud

Push bridge plug to 660'

Spot 80 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe

Fill hole w/heavy mud

Push bridge plug to 300'

Spot 40 sax cement on plug thru 4 $\frac{1}{2}$ " drill pipe

Push bridge plug to 40' w/ $\frac{1}{2}$  sax hulls on plug

Dump 10 sax cement on plug to cellar

Dump 10 sax cement in rat hole and 10 sax cement in mouse hole

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.

STATE OF KANSAS COUNTY OF RUSSELL, ss.  
R.L. SHIELDS (employee of ~~owner~~) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

*R.L. Shields*

Shields Bldg., Russell, Kansas


(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of August, 1982

*Ruth Phillips*

Notary Public.

My commission expires



RECEIVED  
STATE CORPORATION COMMISSION  
08-19-1982  
AUG 19 1982

CONSERVATION DIVISION  
Wichita, Kansas