

15-051-00336-0000


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Ellis County. Sec. 10 Twp. 11 Rge. 17 (E) W (W)  
Location as "NE/CNW/SW" or footage from lines SE NW SE  
Lease Owner Woodman & Iannitti Oil Co.  
Lease Name Richmond Well No. 1  
Office Address Box 387 Hoisington Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed Apr 20~~th~~ 1959  
Application for plugging filed Apr. 5, 1962  
Application for plugging approved Apr. 5, 1962  
Plugging commenced Apr. 5, 1962  
Plugging completed Apr. 8, 1962  
Reason for abandonment of well or producing formation No longer a producer

NORTH

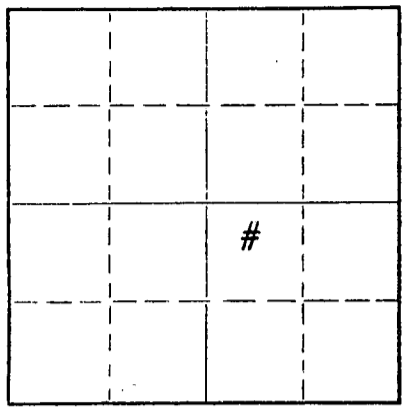

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production Feb. 1, 1962  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty  
Producing formation Arbuckle Depth to top 3369' Bottom 3385' Total Depth of Well 3385 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	171'	none
				5 1/8	3379'	3003'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back with sand from 3385' to 3365'. Mixed and dumped 4 sx. cement from 3365' to 3333'. Pulled casing to 700'. Mixed and circulated 28 sx of weight mud and 17 sx. gel mud. Pulled casing to 320'. Mixed and pumped in 20 sx. cement from 320' to 260'. Pulled casing to 150'. Mixed and pumped in 20 sx. cement from 150' to 90'. Pulled rest casing. Bailed off fluid to 35'. Set 5' rock bridge from 35' to 30'. Mixed and dumped 10 sx. cement from 30' to base cellar.

RECEIVED  
STATE CORPORATION COMMISSION

APR 11 1962 04-11-62

CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.  
Address Box 304 Great Bend, Ks.

STATE OF Kansas, COUNTY OF Barton, ss.  
William D. Hoberecht (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) William D. Hoberecht  
Box 304 Great Bend, Ks.  
(Address)

SUBSCRIBED AND SWORN to before me this 10 day of April, 1962

Paul B. Steiman  
Notary Public.

My commission expires June 24, 1963



DRILLING LOG

Company: Woodman & Iannitti Drilling Company  
 Lease: Richmond # 1 SE NW SE 10-11-17W, Ellis County, Ks.  
 Contractor: Woodman & Iannitti Drilling Company  
 Date Commenced: 4-11-59  
 Date Completed: 4-20-59  
 Total Depth: 3385"  
 Casing: 8 5/8" @ 171'. 5 1/2" @ 3379'

RECEIVED  
 STATE OIL & GAS COMMISSION

APR 11 1962

CONSERVATION DIVISION  
 WICHITA, KANSAS

Figures Indicate the Bottom of Formation

0 - 30	Clay	1070	Anhydrite
40	Sand	1210	Red Bed & Shale
181	Blue Shale & Port Rock	1690	Shale & Shells
200	Cement	1825	Shale
600	Shale	2620	Lime
725	Sand	2825	Shale & Lime
955	Shale & Red Bed	3287	Lime
1033	Red Bed	3385	Lime & Chert

I certify the above to be a true and correct copy of the Driller's Log to the best of my knowledge and belief.

WOODMAN & IANNITTI DRILLING COMPANY

By:

*K. T. Woodman*  
 K. T. Woodman