
## DISTRICT CONSERVATION AGENT'S REPORT

FILE NO.

LOCATION

TO:

State Corporation Commission Conservation Division 800 Bitting Building Wichita, Kansas

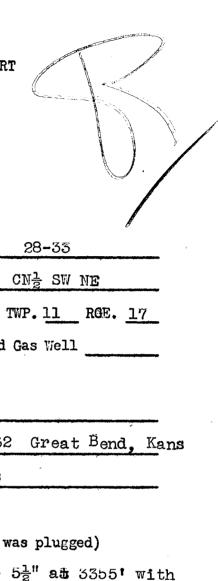

SEC. IS INP. II ROE. IV
Dry Hole Abandoned Oil Well X Abandoned Gas Well
I have today completed supervision of plugging of:
Well No. 2 Lease Cress
Operator B H P Address Box 62 Great Bend, Kan
Field Bemis County Ellis
Total Depth 3356 Feet.
(Describe briefly the manner in which the well was plugged)
8 5/8" at 568' circulated with cement - $5\frac{1}{2}$ " at 3355' with
100 sax cement behind.
Run 4 sax cement on bottom with dump bailer, pulled
2700' 51", pumped in 20 sax Magocgel followed by
Halliburton plug and 80 sax cement - Cement from
240' to 0'.
Gementing and mudding by Globe Cementing Co.
STATE CORPORATION COMMISSION  STATE CORPORATION CORPOR
THE CORPORATION 5 1952
LUGGING CORPORATION STATE CORPORATION 15 1952  Pistrict Conservation Vent
LUGGING District Conservation Kgent

Date