


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

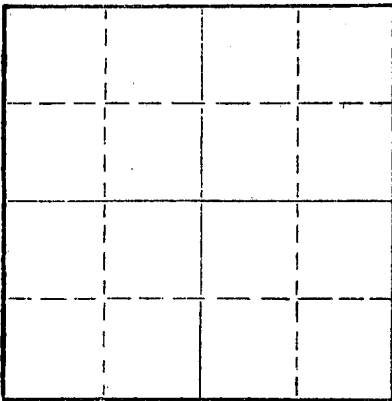

Locate well correctly on above
Section Plat

Russell County, Sec. 2 Twp. 13 Rge. 15 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE NW NW
Lease Owner Shields Oil Producers, Inc.
Lease Name S & S "A" Well No. 1
Office Address Shields Building, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed November 29 19 68
Application for plugging filed November 29 19 68
Application for plugging approved November 29 19 68
Plugging commenced November 29 19 68
Plugging completed November 29 19 68
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation Depth to top Bottom Total Depth of Well 2, 948 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		STATE	RECEIVED	5/8"	233'	Cmtd. w/185 sax
			JAN 8 1969			
			CONSERVATION DIVISION			
			Wichita, Kansas			
			01-08-1969			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill w/ heavy mud to 480'
Set bridge plug @ 480'
Pump 40 sax cement on plug thru 4 1/2" drill pipe
Fill w/ heavy mud to 250'
Set bridge plug @ 250'
Pump 25 sax cement on plug thru 4 1/2" drill pipe
Fill w/ heavy mud to 40'
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

R. J. Shields (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Shields Building, Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of January, 19 69

My commission expires May 26, 1971 [Signature] Notary Public.






Shields

15-167-20246-00-00
Russell, Kansas

WELL LOG

Operator: Shields Oil Producers, Inc.
 Well: S & S "A" #1
 Commenced: November 25, 1968
 Completed: November 29, 1968
 Contractor: Shields Drilling Co., Inc.

Well Description: SE NW NW
 Sec. 2-13S-15W
 Russell County, Kansas



CASING RECORD

Size	Run	Pulled
8 5/8"	233'	Cmtd. w/185 sax

Elevation: 1,794' RB
 Treatment:
 Production: D & A
 Tops: Heebner 2,922'
 Toronto 2,943'

..... Figures Indicate Bottom of Formations

Post rock & shale	255'	
Shale, shells & sand	585'	
Redbed	863'	
Anhydrite	903'	
Shale, shells & salt	1,545'	
Shale & lime	2,680'	
Lime	2,948'	RTD

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 8 1969
 CONSERVATION DIVISION
 Wichita, Kansas
 01-08-1969

Notes