


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Russell County, Sec. 4 Twp. 13 Rge. 15 E/W  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
SE SW SE

Lease Owner D. M. Hague  
Lease Name Sellens Well No. 1  
Office Address Box 823, Great Bend, Kansas 67530  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole  
Date Well completed August 1 1976  
Application for plugging filed August 1 1976  
Application for plugging approved August 1 1976  
Plugging commenced August 1 1976  
Plugging completed August 1 1976  
Reason for abandonment of well or producing formation Dry Hole

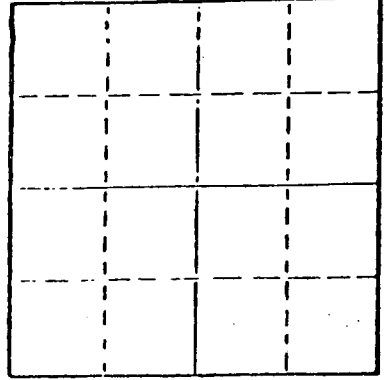

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3330  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Bottom plug @ 550' w/50 sacks cement thru drill pipe.  
Middle plug @ 230' w/25 sacks cement thru drill pipe.  
Top plug @ 40' w/ $\frac{1}{2}$  sack hulls & 10 sacks cement.  
2 sacks cement in rat hole

RECEIVED  
08-05-1976

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.

STATE OF KANSAS COUNTY OF BARTON, ss.

Leonard Williamson (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson  
Box 823, Great Bend, Kansas 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of August, 19 76

Dorothy M. Hague  
Notary Public.

My commission expires April 11, 1978



DRILLER'S WELL LOG

DATE COMMENCED: July 27, 1976  
 DATE COMPLETED: August 1, 1976

D. M. Hague  
 SELLERS # 1  
 SE SW 22  
 Sec 4-T13S-R15W  
 Russell County, Kansas

ELEVATION: 1829 K.B.

0 - 75' Surface Soil, Shale, Post Rock  
 75 - 340' Shale, Sand Streaks, Red Clay  
 340 - 360' Sand  
 360 - 384' Hard Sand  
 384 - 905' Red Bed, Shale  
 905 - 945' Anhydrite  
 945 - 1370' Shale, Red Bed  
 1370 - 2700' Shale, Lime  
 2700 - 2724' Lime  
 2724 - 2734' Shale  
 2734 - 2960' Lime  
 2960 - 2964' Shale  
 2964 - 2979' Shale and Lime  
 2979 - 2991' Lime  
 2991 - 3011' Shale and Lime  
 3011 - 3302' Lime  
 3302 - 3330' Dolomite  
 3330' RTD

FORMATION DATA

Anhydrite	905
Howard	2700
Severy	2724
Topeka	2734
Hebner	2960
Toronto	2979
Douglas	2991
Kansas City	3011
Arbuckle	3302
RTD	3330

SURFACE PIPE:

Set 230' of used 8 5/8", 28#,  
 with 140 sacks 60/40 Pozmix,  
 2% Gal, 3% cc.

AFFIDAVIT

STATE OF KANSAS }  
 COUNTY OF BARTON } ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 3rd day of August, 1976.

Dorothy M. Hague  
 Notary Public

My Commission Expires: April 11, 1978

