

15-167-30275-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Russell County. Sec. 35 Twp. 13S Rge. 14 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines. SE NW S E
Lease Owner White & Ellis Drilling, Inc. et al
Lease Name Boxberger Well No. 1
Office Address Box 448, El Dorado, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9-15 1966
Application for plugging filed 9-15 1966
Application for plugging approved 9-15 1966
Plugging commenced 9-15 1966
Plugging completed 9-15 1966
Reason for abandonment of well or producing formation Dry Hole

NORTH

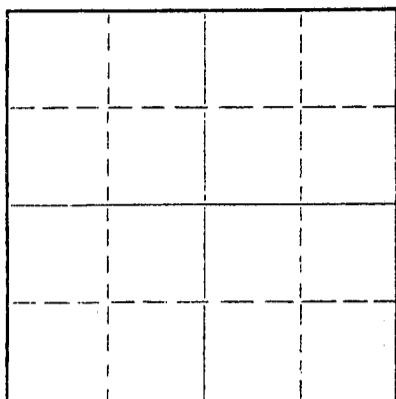

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3285 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	230'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with heavy rotary mud to 220 ft.
Bridge at 220 ft. with hulls and 25 sacks cement. M
Hole filled with mud to 40'. Bridge at 40 ft.
with hulls and 13 sacks cement. Rathole capped
with 2 sacks cement.

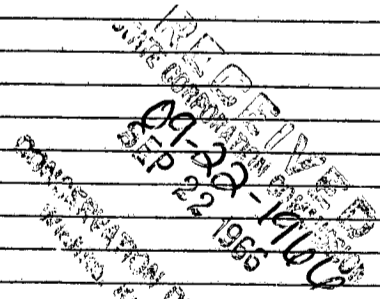

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor White & Ellis Drilling, Inc. License #209
Address Box 448, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.
Ernest Sifford, employee of contractor (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
Box 448, El Dorado, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 20th day of September, 19 66

L.B. Owen
Notary Public.

My commission expires September 26, 1968

15-167-30275-00-00

Casing Record

8 5/8

230' Cemented
w/200 sacks

Location: SE NW SE
Section: 34-13S-14W
Russell County, Kansas
Farm: Boxberger #1
Well Owner: White & Ellis etal
Contractor: White & Ellis
Drilling, Inc.
Commenced: 9-8-66
Completed: 9-15-66
Elevation: 1817' - D.F.

T. D. 3285'

Kelly Bushing Measurement 5' above ground level.

<u>FORMATION</u>	<u>DEPTH</u>
Cellar	0-230
Shale	797
Anyhydrite	910
Shale	965
Shale & Lime	1450
Lime	1990
Shale	2005
Shale & Lime	2200
Lime & Shale	2249
Sand & Shale	2480
Shale & Lime	2710
Lime	2952
Shale & Lime	2987
Lime	3189
Shale & Lime	3215
Lime & Shale	3260
Conglomerate	3275
Lime	3285

TOPS

Anhydrite	808
Topeka	2700
Heebner	2927
Toronto	2946
Kansas City	2987
Arbuckle	3279

RECEIVED
STATE CORPORATION COMMISSION
09-22-1966
SEP 22 1966
CONSERVATION DIVISION
Wichita, Kansas

Dry Hole, Plugged

& Abandoned